




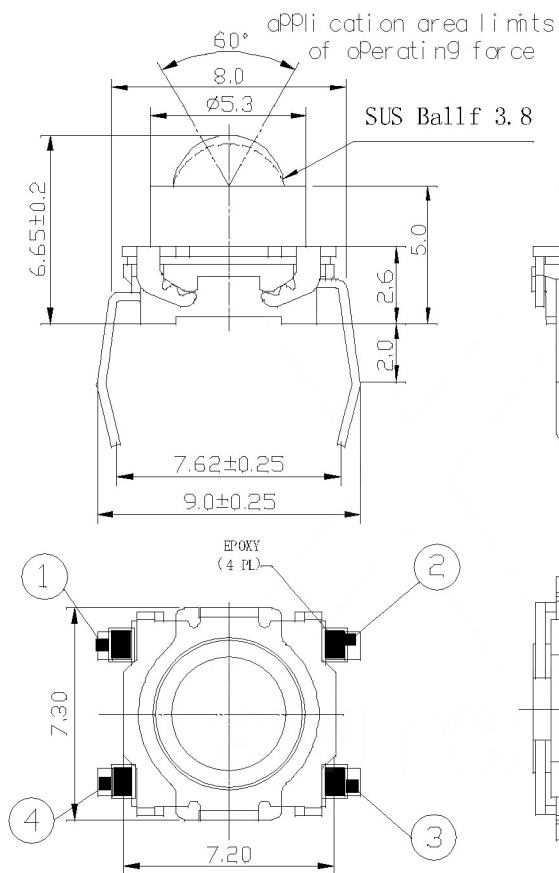

P. C. B Mounting
hole dimension



Circuit Diagram



SPECIFICATION

Contact Rating :	50mA,12V DC
Contact Resistance :	100mΩ max
Insulation Resistance :	100mΩ min.500V DC
Dielectric Strength :	250V AC/1minute
Travel:	0.25mm
Operating Temp :	-40℃~+90℃
Storage Temp :	-30℃~+80℃

PART NO	TC-1110-X
Operating Force A: 130gf B: 200gf C: 300gf D: 500gf	
Height	H: 6.65

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Steel ball		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm		DWN		DATE		VIEW: 	PART NO.:		
△ x					tolerance: X.X	±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.: TC-1110-X		
△ x					X.XX	±0.1mm	APPD		DATE		SIZE: A4			
△ x					X.XXX	±0.05mm								
MARK	DESCRIPTION			DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES					KOSOD TECHNOLOGY CO., LTD		
www.bodongkaiguan.net www.ksdkg.com														
												WEIGHT 1.0g	SHEET 1/1	REVISION A0