


- NOTE:
1. Rating : DC 5V 10mA
  2. Contact Resistance: 100mΩMAX
  3. Insulation Resistance: 100MΩMIN
  4. Soldering Temper:  $260 \pm 5^\circ/5s$
  5. Mechanical Life: 100,000 cycles
  6. Ever Portion  $80 \pm 50$  gf
  7. Push Portion  $205 \pm 80$  gf
  8. Travel:  $-24^\circ 0' +24^\circ$

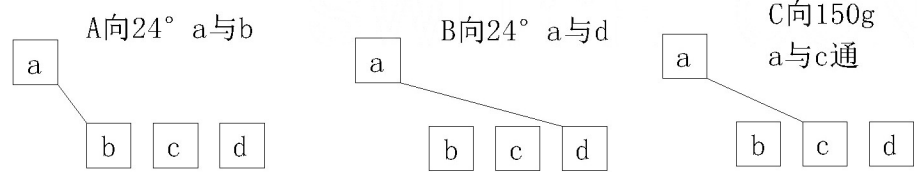

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	5	Phosphor Bronze	Plating silver		
④	Base	1	Lcp			
③	Spring	1	Sus	Natural		
②	Cover	1	Sus	Natural		
①	Keystake	1	Ppa			

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: MULTI-FUNCTIONAL SWITCH
Δ X					ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:
Δ X					X.X ±0.2mm	CHKD	DATE	UNIT: mm	DWG NO.: <b>TM-2011</b>
Δ X					X.XX ±0.1mm	APPD	DATE	SIZE: A4	WEIGHT: 1.0g
MARK					X.XXX ±0.05mm	KOSOD TECHNOLOGY CO., LTD			SHEET: 1/1
REVISIONS									REVISION: A0
www.bodongkaiguan.net www.ksdkg.com									