
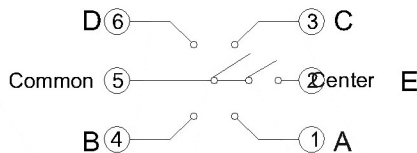


P.C.B LAND DIMENSION

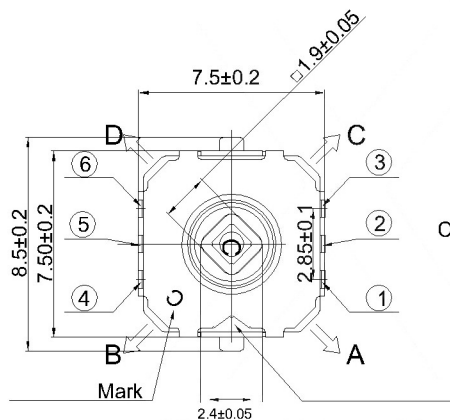

CIRCUIT DIAGRAM

SPECIFICATION

- 1.Rating:DC 12V 50mA Max
- 2.Contact resistance: 500mΩ MAX
- 3.Insulation resistance: 100MΩ Min
- 4.Dielectric strength: 250VAC/min
- 5.TRAVEL: CENTER 0.15±0.10mm
(4-DIRECTION)0.25±0.15mm

PAPT NO	TM-4175-X-X	
Operating force	A	4 Direction 180±50gf Center 250±50gf
	B	4 Direction 240±50gf Center 360±50gf
Height	H: A: 5 B: 6	

⑥	Terminal	—	6	Brass	Plating silver	—
⑤	Contact	—	1	F.ag/Brass	Plating silver	—
④	Base	—	1	Pa46		—
③	Spring	—	10	Sus	Natural	—
②	Cover	—	1	Sus	Natural	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

ΔX					ANGLAR	±5°	DSND		DATE	SCALE: N/A	MODEL TYPE:	
ΔX					X.X	±0.2mm	DWN		DATE	VIEW:	MULTI-FUNCTIONAL SWITCH	
ΔX					X.XX	±0.1mm	CHKD		DATE	UNIT: mm	PART NO.:	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	±0.05mm	APPD		DATE	SIZE: A4	DWG NO.:	
		REVISIONS		UNSPECIFIED TOLERANCES						TM-4175-X-X		
www.bodongkaiguan.net		www.ksdkg.com						Kosod Technology Co., Ltd.		WEIGHT	SHEET	REVISION
										1.0g	1/1	A0