


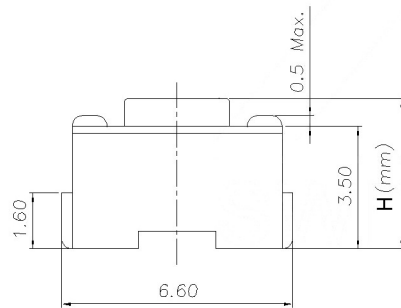


P.C.B Mounting
pattern Dimension

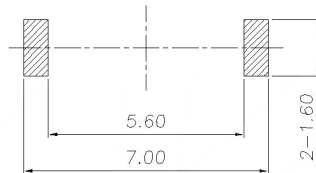

SPECIFICATION

Contact Rating : 50mA,12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min.500V DC
 Dielectric Strength : 250V AC/1minute
 Travel : 0.25mm
 Operating Temp : -20℃~+70℃
 Storage Temp : -30℃~+80℃

PAPT NO	TS-1101NH-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:4.3 B:5.0 C:6.0 D:7.0
colour	B:black W:white

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					units: mm	DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					tolerance:	DWN		DATE		VIEW:	PART NO.:		
△X					X.X ±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:		
△X					X.XX ±0.1mm	APPD		DATE		SIZE: A4	TS-1101NH-X-X-X		
△X					X.XXX ±0.05mm						WEIGHT	SHEET	REVISION
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	KOSOD TECHNOLOGY CO., LTD					1.0g	1/1	A0
www.bodongkaiguan.net		www.ksdkg.com											