
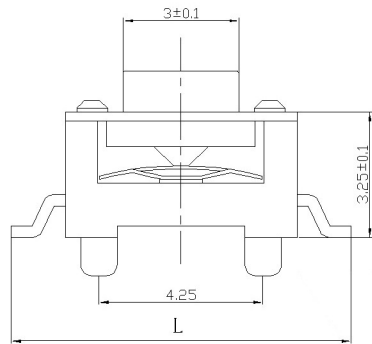


A:With B:without

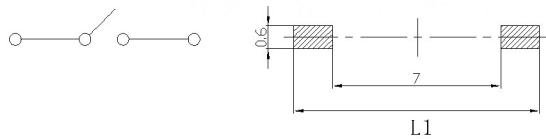

P	L	L1
A	8.0	10
B	8.5	11
C	9.0	12
D	9.5	13
E	10	14

SPECIFICATION

Contact Rating : 50mA,12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min.500V DC
 Dielectric Strength : 250V AC/1minute
 Travel: 0.25mm
 Operating Temp : -20℃~+70℃
 Storage Temp : -30℃~+80℃

PAPT NO	TS-1101S-X-X-A-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H: A:4.3 B:5.0 C:6.0 D:7.0
Fixed column	A:With B:without
color	B:black W:white
Pin pitch	P

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46	—	—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	units: mm
ΔX					tolerance:
ΔX					X.X ±0.2mm
ΔX					X.XX ±0.1mm
MARK					X.XXX ±0.05mm
UNSPECIFIED TOLERANCES					

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
KOSOD TECHNOLOGY CO., LTD					TS-1101S-X-X-A-X-X
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	