


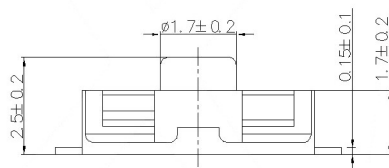



SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃




PAPT NO	TS-1105G-X-X-A
Operating Force	A: 100gf B: 160gf C: 260gf
Height	II: 2.5
color	B: black BL: blue
line	A: normally open B: normally closed

B




P.C.B MOUNTING HOLES



PACKING REEL TYPE 3,000/1 REEL (EA)

A



⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Silica gel		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
KOSOD TECHNOLOGY CO., LTD					TS-1105G-X-X-A
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	

units: mm					
tolerance:					
X.X	±0.2mm				
X.XX	±0.1mm				
X.XXX	±0.05mm				
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS					
www.bodongkaiguan.net www.ksdkg.com					