



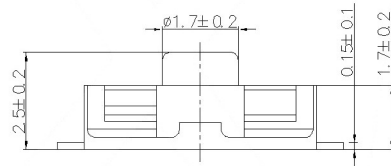


SPECIFICATION


Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C ~ +85°C
 Storage Temp: -30°C ~ +80°C




PAPT NO	TS-1105G-X-X-B
Operating Force	A: 100gf B: 160gf C: 260gf
Height	II: 2.5
color	B: black BL: blue
line	A: Normally open B: Normally closed



P.C.B MOUNTING HOLES



PACKING REEL TYPE 3,000/1 REEL (EA)



ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Silica gel	—	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					units: mm
ΔX					tolerance: X.X ±0.2mm
ΔX					X.XX ±0.1mm
					X.XXX ±0.05mm
REVISIONS					
www.bodongkaiguan.net www.ksdkg.com					

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm	DWG NO.:	
APPD		DATE		SIZE: A4	TS-1105G-X-X-B	
KOSOD TECHNOLOGY CO., LTD				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0