

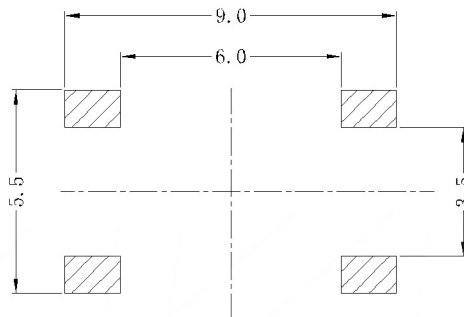



**P.C.B LAYOUT
TOP VIEW**

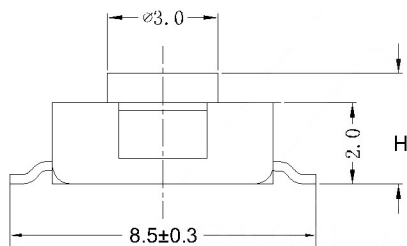

SCHEMATIC



Code-X	H
A	2.55
B	3.1
C	3.4
D	3.8
E	4.3

PAPT NO	TS-1157-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-X

SPECIFICATION
 Contact Rating : 50mA,12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min.500V DC
 Dielectric Strength : 250V AC/1minute
 Travel: 0.25mm
 Operating Temp : -30℃~+85℃
 Storage Temp : -30℃~+80℃

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

					units: mm	DSND	DATE	SCALE: N/A	MODEL TYPE:		
ΔX					tolerance:	DWN	DATE	VIEW:	TACT SWITCH		
ΔX					X.X ±0.2mm	CHKD	DATE	UNIT: mm	PART NO.:		
ΔX					X.XX ±0.1mm	APPD	DATE	SIZE: A4	DWG NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm				TS-1157-X-X		
					UNSPECIFIED TOLERANCES	KOSOD TECHNOLOGY CO., LTD			WEIGHT	SHEET	REVISION
									1.0g	1/1	A0