



IP67



CIRCUIT DIAGRAM




SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TS-1159B-X-X-X
Operating Force	A:100gf B:160gf C:260gf D:320gf E:400gf
Height	II:A:3.4 B:4.2 C:4.8 D:5.1
color	BL:blue W:white

P.C.B LAND DIMENSION

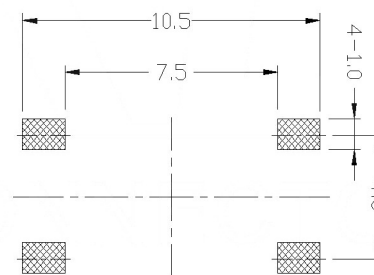

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Silica gel	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	units: mm
ΔX					tolerance:
ΔX					X.X ±0.2mm
ΔX					X.XX ±0.1mm
ΔX					X.XXX ±0.05mm
					UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE:		
DWN		DATE		VIEW: 	TACT SWITCH		
CHKD		DATE		UNIT: mm	PART NO.:		
APPD		DATE		SIZE: A4	DWG NO.:		
					TS-1159B-X-X-X		
KOSOD TECHNOLOGY CO., LTD					WEIGHT	SHEET	REVISION
					1.0g	1/1	A0