
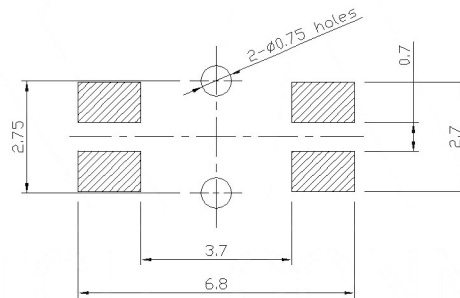



SPECIFICATION

Contact Rating : 50mA,12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min.500V DC
 Dielectric Strength : 250V AC/1minute
 Travel : 0.20mm
 Operating Temp : -30℃~+85℃
 Storage Temp : -30℃~+80℃

P.C.B MOUNTING PATTERN DIMENSION

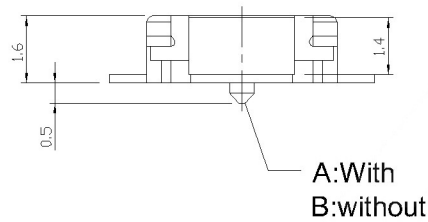

PAPT NO	TS-1186D-X-X
Operating Force	B: 160gf C: 260gf
Height	H: 4.5
Fixed column	A:With B:without



CIRCUIT DIAGRAM

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					units: mm	DSND		DATE		SCALE: N/A	MODEL TYPE:	
					tolerance:	DWN		DATE		VIEW:	TACT SWITCH	
					X.X	±0.2mm	CHKD		DATE		UNIT: mm	PART NO.:
					X.XX	±0.1mm	APPD		DATE		SIZE: A4	DWG NO.:
					X.XXX	±0.05mm	Kosod Technology Co., Ltd.				TS-1186D-X-X	
					UNSPECIFIED TOLERANCES	WEIGHT					SHEET	REVISION
www.bodongkaiguan.net					www.ksdkg.com	1.0g		1/1	A0			