
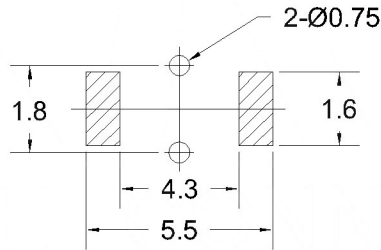


A:With
B:without

SPECIFICATION


Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.20mm
 Operating Temp: -30°C ~ +85°C
 Storage Temp: -30°C ~ +80°C

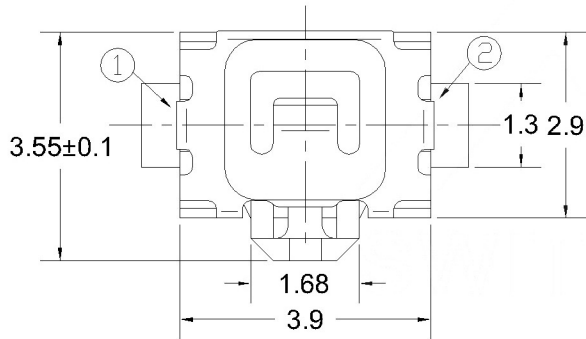

PCB

PART NO	TS-1186E-X-X
Operating Force	B: 160gf C: 260gf D: 360gf
Height	H: 3.55
Fixed column	A:With B:without

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Pa46		—



MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					units: mm
Δx					tolerance:
Δx					X.X ±0.2mm
					X.XX ±0.1mm
					X.XXX ±0.05mm
					REVISIONS
					www.bodongkaiguan.net www.ksdkg.com

DSND	DATE	SCALE: N/A	MODEL TYPE:		
DWN	DATE	VIEW:	TACT SWITCH		
CHKD	DATE	UNIT: mm	PART NO.:		
APPD	DATE	SIZE: A4	DWG NO.:		
KOSOD TECHNOLOGY CO., LTD			TS-1186E-X-X		
			WEIGHT	SHEET	REVISION
			1.0g	1/1	A0