


P.C.B LAYOUT
TOP VIEW

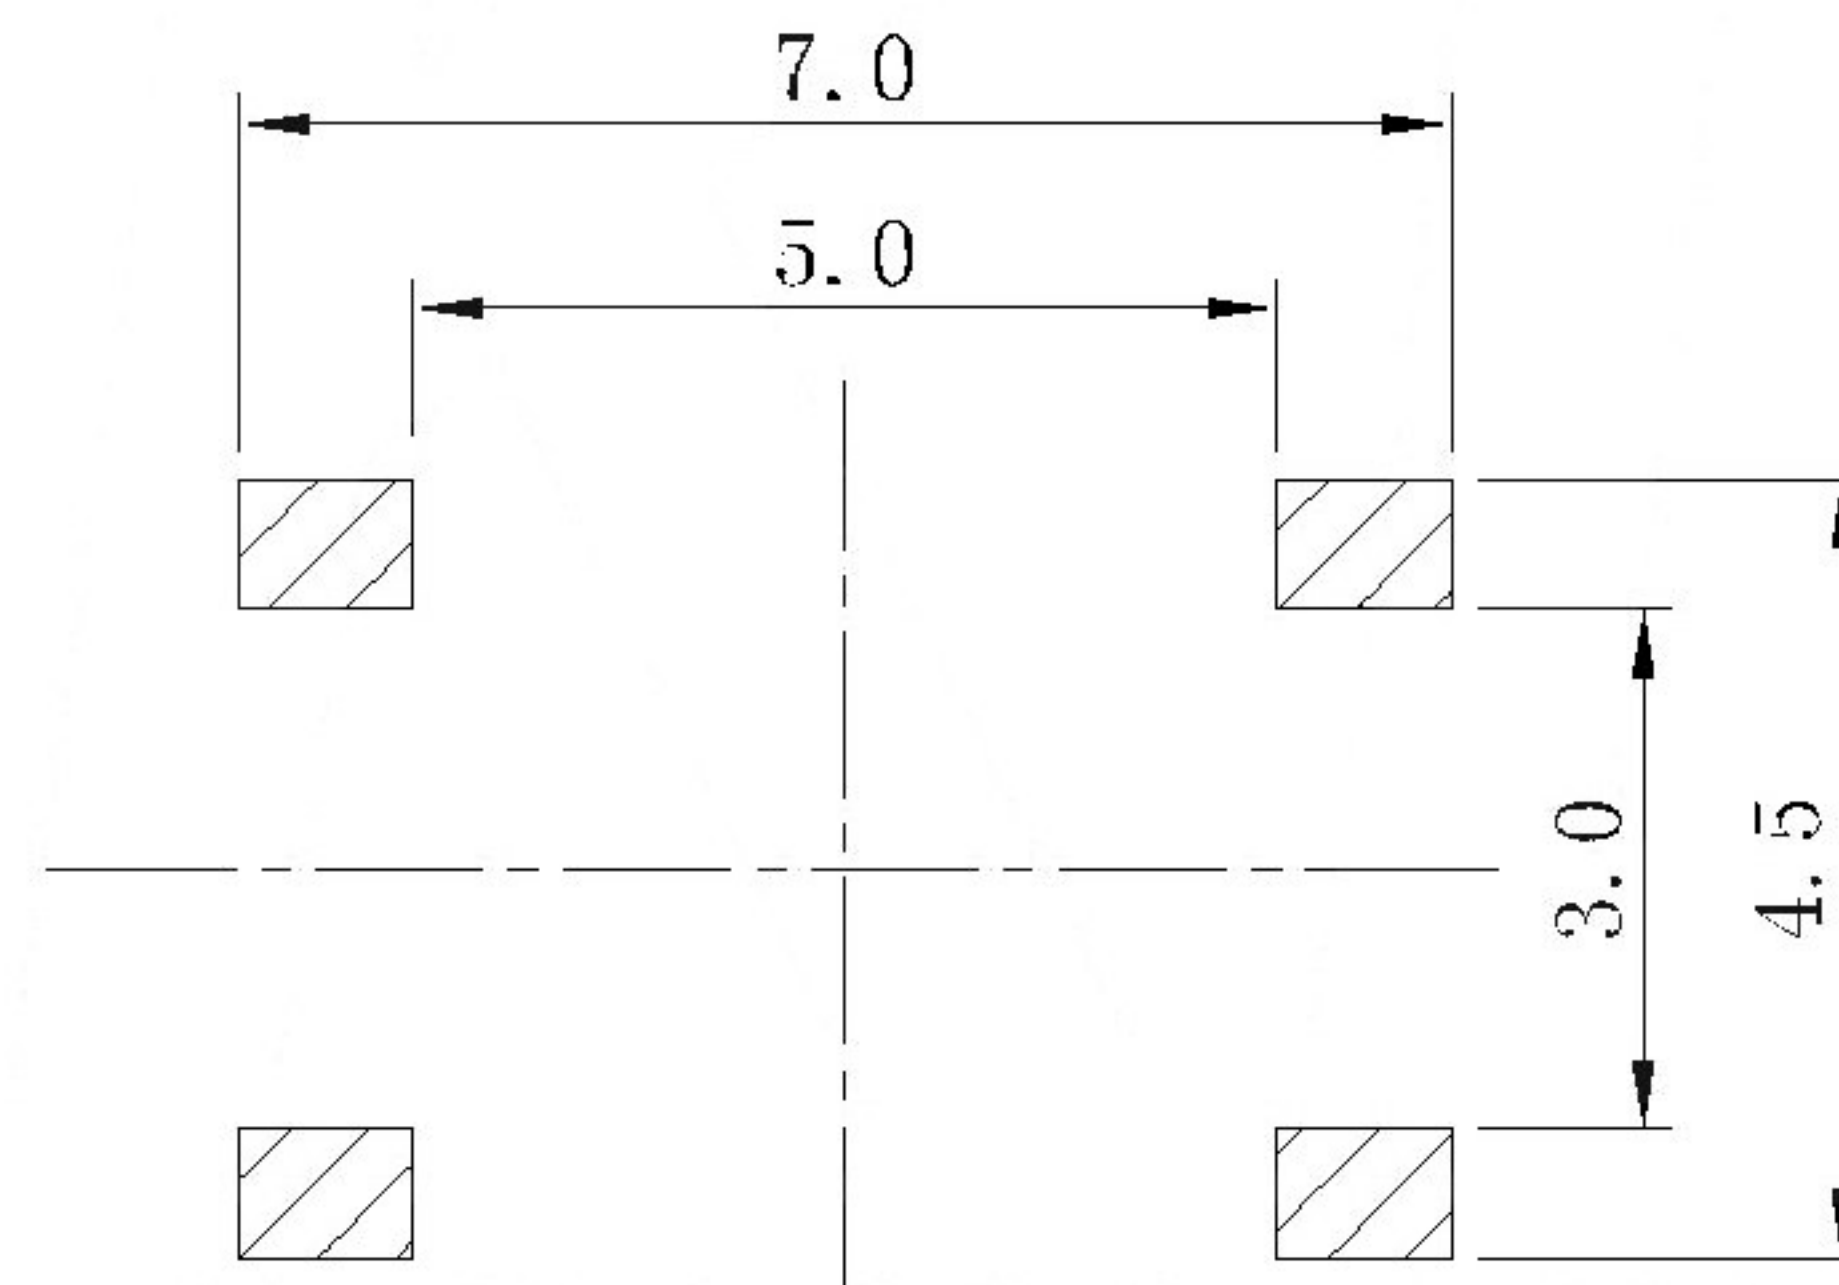

Code-X	H
A	1.5
B	1.6
C	1.7
D	2.0
E	2.5
F	3.0
G	3.5
H	4.0
I	4.5
J	5.0

PAPT NO	TS-1187A-X-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	Code-X
Keystake	A: PA46 B: Brass

SPECIFICATION

Contact Rating : 50mA, 12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min. 500V DC
 Dielectric Strength : 250V AC/1minute
 Travel : 0.25mm
 Operating Temp : -30°C ~ +85°C
 Storage Temp : -30°C ~ +80°C

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Sus	Plating Nickel	—
①	Keystake	—	1	Pa46/Brass		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					units: mm	DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					tolerance:	DWN		DATE		VIEW:	PART NO.:		
Δx					X.X ±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:		
Δx					X.XX ±0.1mm	APPD		DATE		SIZE: A4	TS-1187A-X-X-X		
Δx					X.XXX ±0.05mm	KOSOD TECHNOLOGY CO., LTD					WEIGHT	SHEET	REVISION
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES						1.0g	1/1	A0
REVISIONS													
www.bodongkaiguan.net www.ksdkg.com													