
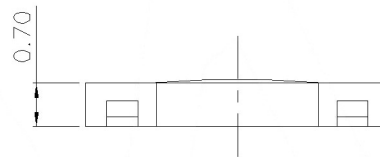


PCB Layout(Pattern side)

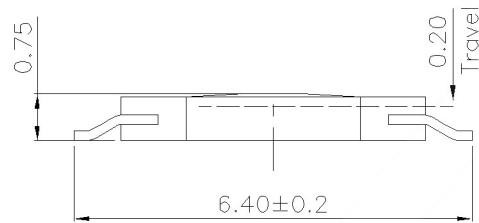

PAPT NO	TS-1187B-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	H: 0.75

SPECIFICATION

Contact Rating : 50mA, 12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min.500V DC
 Dielectric Strength : 250V AC/1minute
 Travel : 0.25mm
 Operating Temp : -30℃~+85℃
 Storage Temp : -30℃~+80℃

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	TS-1187B-X
units: mm tolerance: X.X ±0.2mm X.XX ±0.1mm X.XXX ±0.05mm UNSPECIFIED TOLERANCES				Kosod Technology Co., Ltd.	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	REVISION
ΔX					
ΔX					
ΔX					
www.bodongkaiguan.net					WEIGHT 1.0g SHEET 1/1 REVISION A0