



CIRCUIT




SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C~+85°C
 Storage Temp: -30°C~+80°C

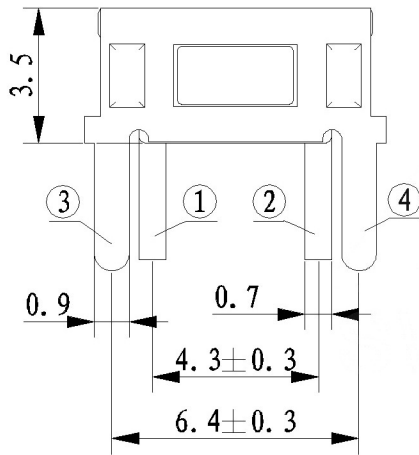

P. C. B LAYOUT

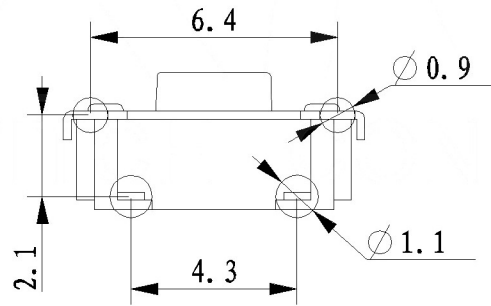

PAPT NO	TS-1188A-X-X
Operating Force	B:160gf C:260gf
Height	H: A: 3.55 B: 4.3 C: 5.0

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Lcp	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						units: mm
ΔX						tolerance: X.X ±0.2mm
ΔX						X.XX ±0.1mm
ΔX						X.XXX ±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED		UNSPECIFIED TOLERANCES
REVISIONS www.bodongkaiguan.net www.ksdkg.com						

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		DATE		VIEW:	PART NO.:		
CHKD		DATE		UNIT: mm	DWG NO.:		
APPD		DATE		SIZE: A4	TS-1188A-X-X		
KOSOD TECHNOLOGY CO., LTD					WEIGHT	SHEET	REVISION
					1.0g	1/1	A0