
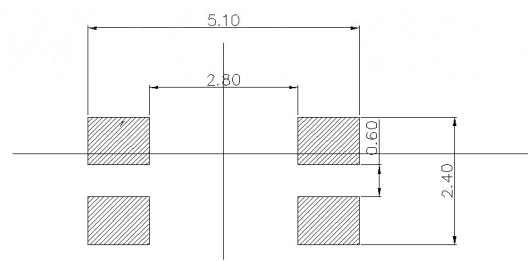

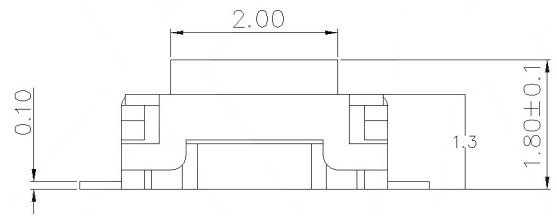


**SPECIFICATION**

Contact Rating: 50mA, 12V DC  
 Contact Resistance: 100mΩ max  
 Insulation Resistance: 100mΩ min.500V DC  
 Dielectric Strength: 250V AC/1minute  
 Travel: 0.25mm  
 Operating Temp: -30℃~+85℃  
 Storage Temp: -30℃~+80℃

PAPT NO	TS-1809SM-X
Operating Force	A: 100gf B: 160gf C: 260gf



ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Pa46		—

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.: TS-1809SM-X
APPD		DATE		SIZE: A4	
UNSPECIFIED TOLERANCES				KOSOD TECHNOLOGY CO., LTD	WEIGHT: 1.0g
					SHEET: 1/1
					REVISION: A0

MARK	DESCRIPTION	DATE	REVISED	APPROVED