
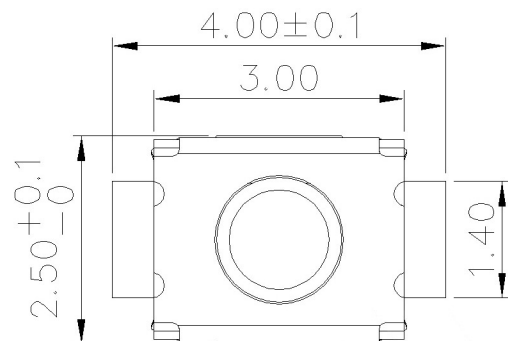
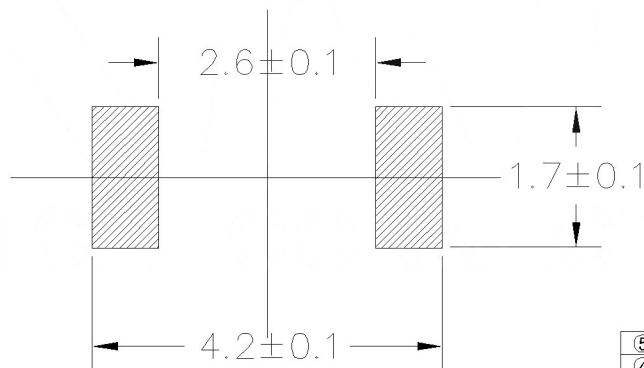


CIRCUIT

A:With
B:without

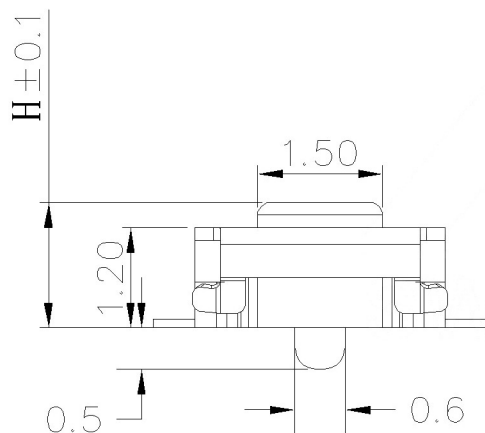

SPECIFICATION

Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

PAPT NO	TS-3025-X-X-X
Operating Force	A: 160gf B: 260gf C: 350gf
Height	H: A: 1.5 B: 1.6 C: 1.7
Fixed column	A:With B:without

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: tolerance:	mm	DWN		DATE	VIEW: 	PART NO.:		
△ x													
△ x						X.X ±0.2mm	CHKD		DATE	UNIT: mm			
△ x						X.XX ±0.1mm					DWG NO.:		
MARK	DESCRIPTION			DATE	REVISED	APPROVED	X.XXX ±0.05mm	APPD		DATE	SIZE: A4		
						UNSPECIFIED TOLERANCES					KOSOD TECHNOLOGY CO., LTD		
											WEIGHT 1.0g	SHEET 1/1	REVISION A0