


CIRCUIT DIAGRAM

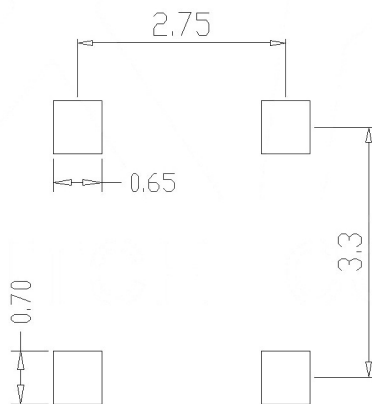

PCB.circuit prohibited area

SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min.500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.20mm
 Operating Temp: -30℃~+85℃
 Storage Temp: -30℃~+80℃

PAPT NO	TS-3737-X
Operating Force	B: 160gf C: 260gf
Height	II: 0.4

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	kapton filmPI	Plating Nickel	—
①	Keystake	—	1	—	—	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					
ΔX					
ΔX					
REVISIONS					UNSPECIFIED TOLERANCES
www.bodongkaiguan.net www.ksdkg.com					

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	TACT SWITCH
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
> KOSOD TECHNOLOGY CO., LTD			WEIGHT: 1.0g
			SHEET: 1/1
			REVISION: A0