








Scrolls (S)

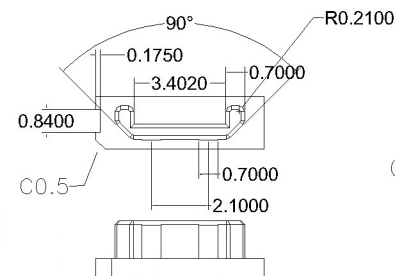

Flat(F)

1:With 2:Without



Material

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Brass

Electrical

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30mΩ Max

Insulation resistance: 1000MΩ Min


Dielectric withstanding voltage: 250V AC/Minute

Mechanical

Durability: 3,000 cycles

Mating Force: 35N (3.57Kgf) Max

Unmating Force: 8N (0.82Kgf) Min.



DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB
DWN		DATE		VIEW:	PART NO.: U-E-05XX-4BH21
CHKD		DATE		UNIT: mm	DWG NO.: U-E-05XX-4BH21-XXB
APPD		DATE		SIZE: A4	WEIGHT 1.0g
KOSOD TECHNOLOGY CO., LTD					SHEET 1/1
					REVISION A0

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 63	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

REVISIONS	UNSPECIFIED TOLERANCES
www.bodongkaiguan.net	www.ksdkg.com