
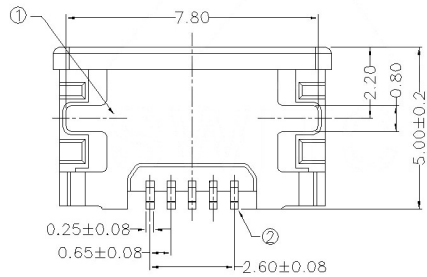
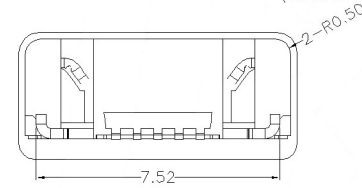



Recommended PCB Layout
(General Tolerance: ±0.05)

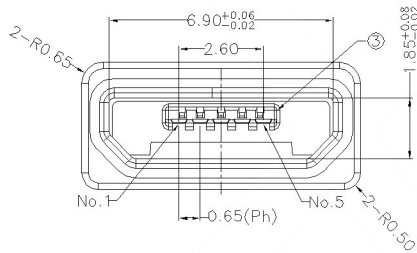

③	Shell	1	Stainless Steel	
②	Terminal	5	Copper Alloy	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

- Contact Resistance: 30mOHM Max.;
- Dielectric Withstanding Voltage: 100V AC For 1 Minute;
- Insulation Resistance: 1000M OHM Min.;
- Mating And Unmating Force:
Mating Force: 35N Max/Unmating Force: 8N Min;
- Durability: 10000 Cycles;

ΔX						ANGULAR	±5°
ΔX						L ≤ 4	±0.2
ΔX						4 < L ≤ 16	±0.3
MARK	DESCRIPTION	DATE	REVISED	APPROVED		16 < L ≤ 63	±0.4
	REVISIONS					L > 63	±0.5
	www.bodongkaiguan.net					UNSPECIFIED TOLERANCES	
	www.ksdkg.com						

DSND		DATE	SCALE: N/A	MODEL TYPE:	MICRO USB
DWN		DATE	VIEW:	PART NO.:	
CHKD		DATE	UNIT: mm	DWG NO.:	U-E-M5SS-Y-5
APPD		DATE	SIZE: A4	WEIGHT	1.0g
	KOSOD TECHNOLOGY CO., LTD			SHEET	1/1
				REVISION	A0