

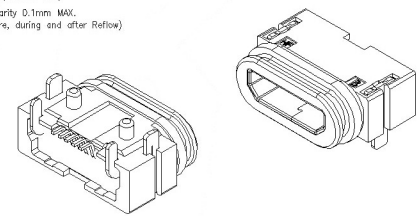
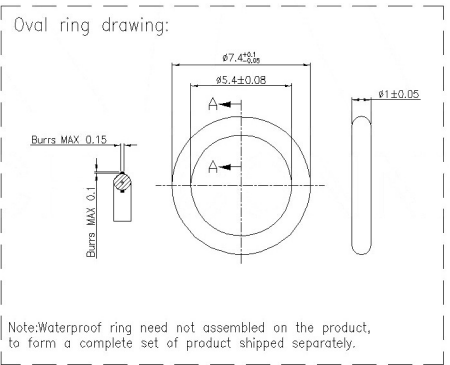

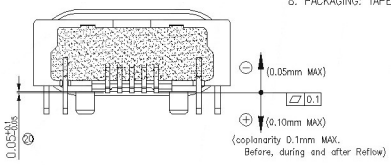



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
 - CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 3.6 KGF (MAX)
 - WITHDRAWAL FORCE : 0.8 KGF(Reference)
 - DURABILITY: 10,000 CYCLES .
 - WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7(1m,30min)
 - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
 - OVAl RING:
 - The amount of low molecular siloxanes(D3~D10)is less than 200ppm
 - Hardness of silicone rubber:70°
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE & REEL.

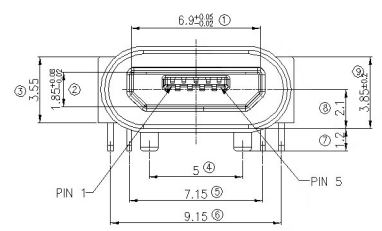

④	Contact	5	C18140H T=0.20	
③	Shell	1	SUS304 T=0.25	Nickel
②	Terminal	2	C2680 T=0.3	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PART NAME	QTY	MATERIAL	FINISHING

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

ΔX					ANGULAR	±5°	DSND		DATE	SCALE: N/A	MODEL TYPE:		
ΔX					L ≤ 4	±0.2	DWN		DATE	VIEW:	MICRO USB		
ΔX					4 < L ≤ 16	±0.3	CHKD		DATE	UNIT: mm	PART NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4	APPD		DATE	SIZE: A4	DWG NO.:		
					L > 63	±0.5					U-E-M7SS-Y-1		
					UNSPECIFIED TOLERANCES						WEIGHT	SHEET	REVISION
	www.bodongkaiguan.net						KOSOD TECHNOLOGY CO., LTD				1.0g	1/1	A0