





Scrolls (S)

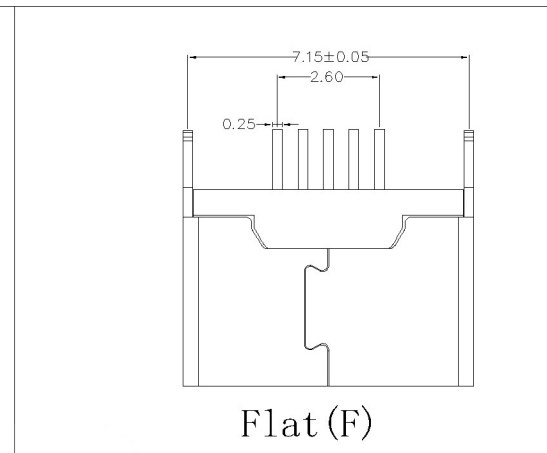

Flat (F)

Material
 Housing Material: LCP, UL94V-0, black
 Contact Terminal: Copper Alloy
 Metallic Shell: Sus
Electrical
 Voltage Rating: 30 V AC
 Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A
 Contact Resistance: 30mΩ Max
 Insulation resistance: 1000MΩ Min
 Dielectric withstanding voltage: 250V AC/Minute
Mechanical
 Durability: 10,000 cycles
 Mating Force: 35N (3.57Kgf) Max
 Unmating Force: 8N (0.82Kgf) Min.

U255-05XX-4BH70-X-S

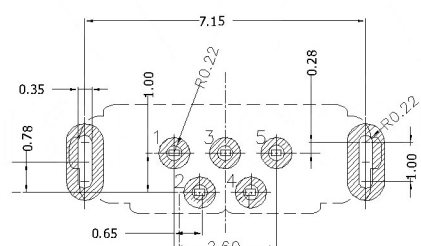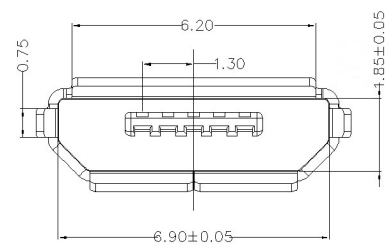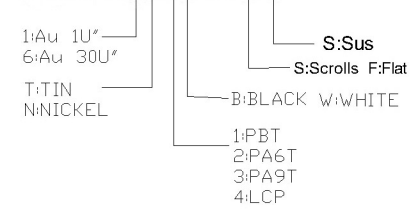

RECOMMENDED P.C.B LAYOUT

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 63 ±0.3
					168 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	MICRO USB
CHKD	DATE	UNIT: mm	PART NO.: U255-05XX-4BH70
APPD	DATE	SIZE: A4	DWG NO.: U255-05XX-4BH70-XS
			WEIGHT SHEET REVISION
			1.0g 1/1 A0

KOSOD TECHNOLOGY CO., LTD

www.bodongkaiguan.net www.ksdkg.com