
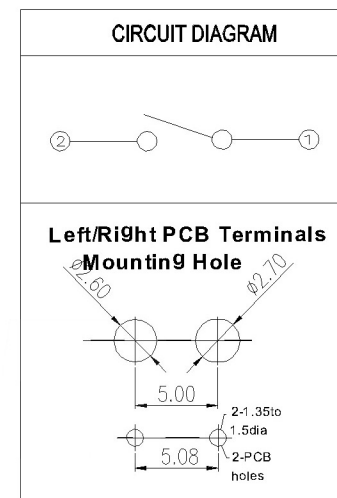


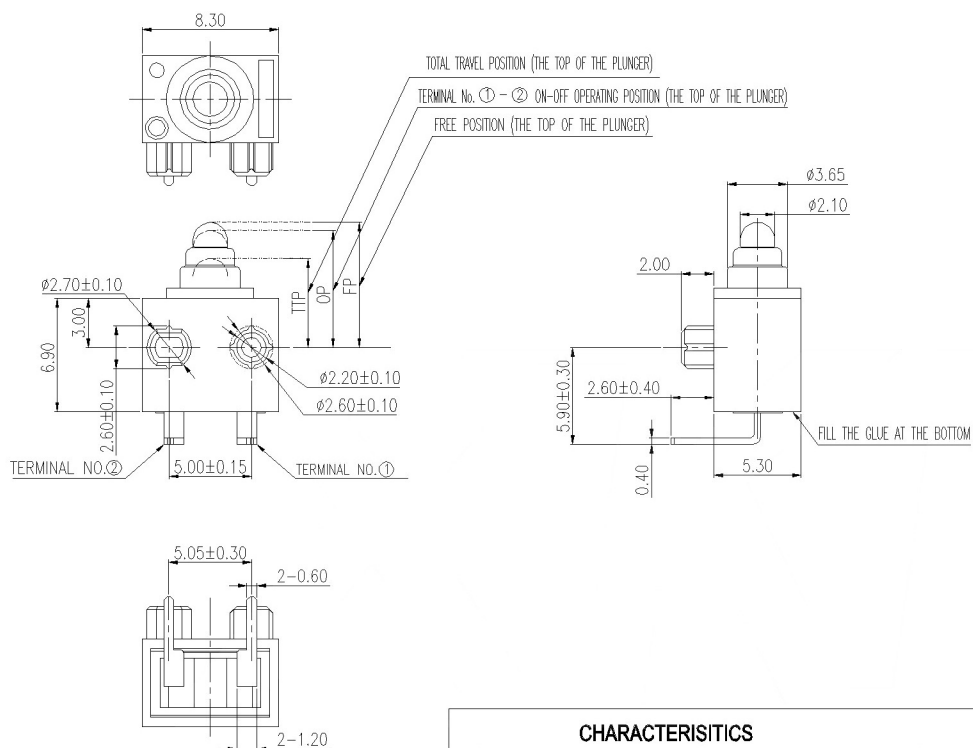

CHARACTERISITICS		CHANGEOVER TIMING: SPST-NO	
OPERATING FORCE:	150gf MAX.(50gf Min.)	IP GRAGE: IP67	
FREE POSITION:	7.9MM MAX.	RATINGS	
OPERATING POSITION:	7.1±0.40MM.	12V DC	0.1A
TOTAL TRAVEL POSITION:	5.1MM MAX.	5V DC	50 μA

							DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO SWITCH		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△X					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: XG304-150U00E40		
△X					4<L ≤ 16	±0.3								
△X					16<L ≤ 63	±0.4	APPD		DATE		SIZE: A4	WEIGHT 1.0g		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5								
REVISIONS							UNSPECIFIED TOLERANCES					KOSOD TECHNOLOGY CO., LTD	SHEET 1/1	REVISION A0
www.bodongkaiguan.net www.ksdkg.com														