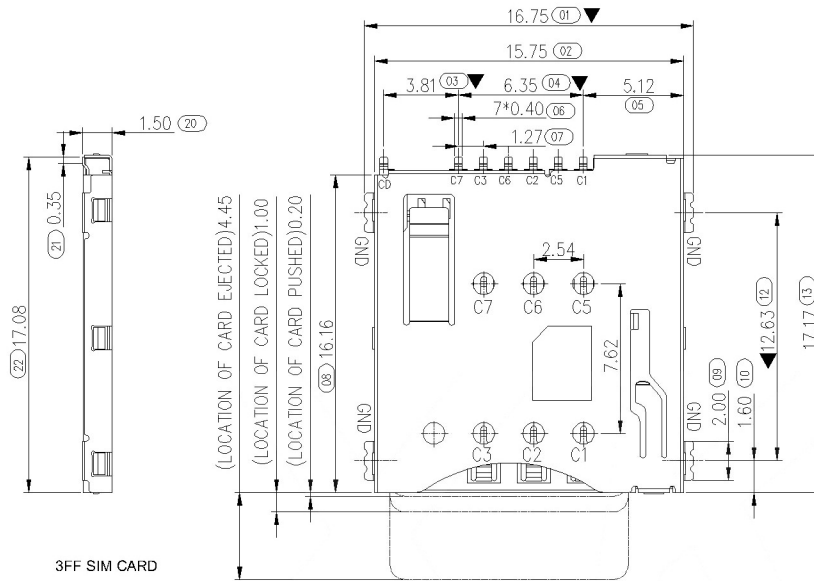



NOTES:

1. SPECIALITY:

- 1.1 Rated current:1.0A
- 1.2 Rated voltage:30V
- 1.3 Contact Resistance:50mΩ MAX
- 1.4 Insulation Resistance:1000MΩ MIN 500V DC
- 1.5 Dielectric withstanding voltage: 500V AC.
- 1.6 Solder ability:250±5℃, 5±0.5s.
- 1.7 Durability:1500 Cycles Min.
- 1.8 Operating condition:Temperature-40℃~+85℃;
Humidity 80% R.H MAX


2. PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



3FF SIM CARD

Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

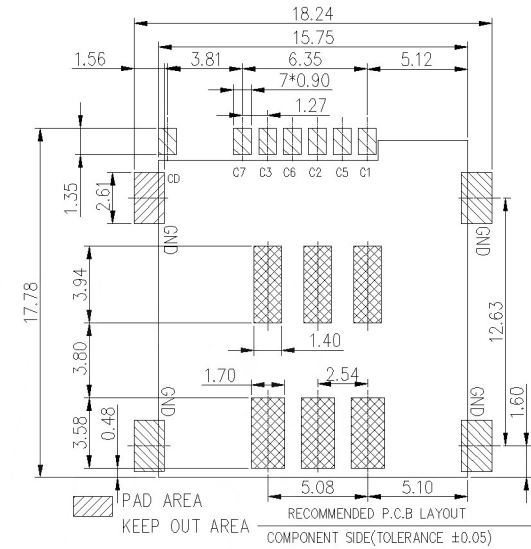

ITEM	PART NAME	Q'TY	MATERIAL	FINISHING
1	HOUSING	1	HI-TEMP.PLASIC	Black UL94V-0
2	TERMINAL	7	COPPER ALLOY	Contact area : Gold plated
3	CD SWITCH	1	COPPER ALLOY	Contact area : Gold plated
4	SHELL	1	SUS	SMT area : Gold plated
5	SPRING	1	SWP	
6	HEART CAM	1	HI-TEMP.PLASIC	Black UL94V-0
7	CAM PIN	1	SUS	

							DSND		DATE		SCALE: N/A	MODEL TYPE: SIM CARD CONN			
△ x						ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△ x						4<L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	DWG NO.:		
△ x						16<L ≤ 63	±0.4	APPD		DATE		SIZE: A4	XKSIM-003-P7		
MARK	DESCRIPTION			DATE	REVISED	APPROVED	L > 63		±0.5						
REVISIONS							UNSPECIFIED TOLERANCES		KOSOD TECHNOLOGY CO., LTD				WEIGHT	SHEET	REVISION
													1.0g	1/1	A0
www.bodongkaiguan.net www.ksdkg.com															