


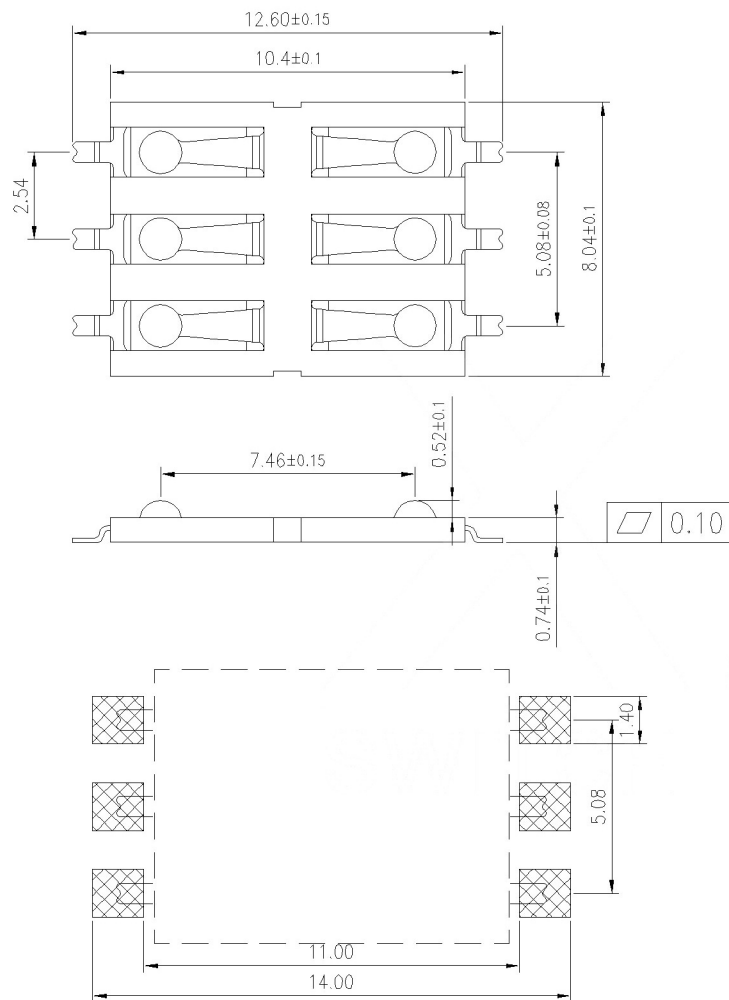

NOTE:

1. ELECTRICAL CHARACTERISTICS

1-1. CURRENT RATE:1.0A

1-2. CONTACT RESISTANCE: 100 milliohms MAX.

1-3. INSULATION RESISTANCE: 1,000 Megohms MIN.

1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
FOR 1 MINUTE.

2. RoHS 2002/95/EC COMPLIANT.

②	Terminal	6	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

						ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE:		
Δ X						L ≤ 4	±0.2	DWN		DATE		VIEW: 	SIM CARD CONN		
Δ X						4<L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	PART NO.:		
Δ X						16<L ≤ 63	±0.4	APPD		DATE		SIZE: A4	DWG NO.:		
MARK		DESCRIPTION		DATE	REVISED	APPROVED	L > 63						XKSIM-005		
REVISIONS							UNSPECIFIED TOLERANCES	Kosod Technology Co., Ltd.					WEIGHT	SHEET	REVISION
www.bodongkaiguan.net							www.ksdkg.com						1.0g	1/1	A0