


NOTES:

- 1) MATERIAL:
HOUSING: LCP UL 94V-0
CONTACT: C5210R-H,T=0.15
SHELL: SUS201,T=0.15
- 2) FINISH :
CONTACT: GOLD FLASH PLATED ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER TAILS, WITH ENTIRE CONTACT UNDERPLATED 50u"Min. NICKEL
SHELL: 50u"Min. NICKEL UNDERPLATED OVERALL, GOLD FLASH PLATED ON SOLDER TAILS
- 3) ELECTRICAL REQUIREMENTS:
CURRENT: 0.5A
VOLTAGE: 100V
CONTACT RESISTANCE: 100mΩ MAX
INSULATION RESISTANCE 100 MEGOHMS MIN
- 4) MECHANICAL
DURABILITY 3000 CYCLES

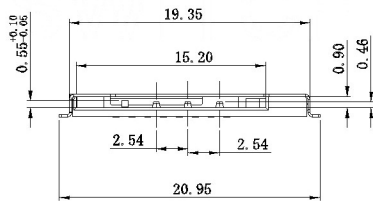

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	SUS	
②	Terminal	8	COPPER ALLOY	
①	Housing	1	HI-TEMP. PLASIC UL 94V-0	BLACK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: SIM CARD CONN
Δ X					ANGULAR ±5°	DWN	DATE	VIEW:	PART NO.:
Δ X					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.:
Δ X					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	XKSIM-047
					16 < L ≤ 63 ±0.4				WEIGHT
					L > 63 ±0.5				1.0g
									SHEET
									1/1
									REVISION
									A0