




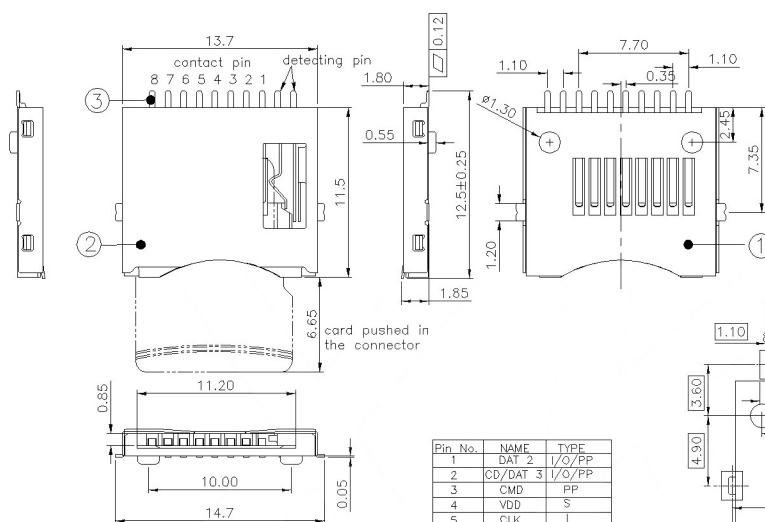


Pin No.	NAME	TYPE
1	DAT 2	I/O/PP
2	CD/DAT 3	I/O/PP
3	CMD	PP
4	VDD	S
5	CLK	I
6	VSS	S
7	DAT0	I/O/PP
8	DAT1	I/O/PP



RECOMMENDED P.C.B LAYOUT(TOP VIEW)
GENERAL TOLERANCE ± 0.05



WITHOUT CARD, SWITCH OPENED IN THE CONNECTOR;
WHEN CARD PUSHED-IN, SWITCH WAS CLOSED



NOTE:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CONTACT RESISTANCE: 50 milliohms MAX.
- 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS

- 2-1. RETENTION FORCE: MIN.100gf/PIN
- 2-2. RoHS 2002/95/EC COMPLIANT.
- 3. RESISTANCE TO REFLOW SOLDERING HEAT: 260°C Max

ITEM	PART NAME	QTY	MATERIAL	FINISHING
③	Shell	1	BRASS	
②	Terminal	10	BRASS	
①	Housing	1	LCP UL 94V-0	BLACK

MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE:
Δ X						ANGULAR				TF CARD CONN
Δ X						$L \leq 4$			VIEW:	PART NO.:
Δ X						$4 < L \leq 16$			UNIT: mm	DWG NO.:
						$16 < L \leq 63$			SIZE: A4	XKTF-005
						$L > 63$				WEIGHT
										1.0g
										SHEET
										1/1
										REVISION
										A0

Kosod Technology Co., Ltd.