
industrial equipment portable tools pumps & motors telecom

test equipment







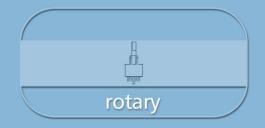













Rotary Switches Product Selection Guide



Rotary			* 8 7 ° 1000°					•	
Series	Α	RTA	М	R	F	н	RW	RM	ENC
Switch Type	Multi-pole/ Multi-position	Multi-pole/ Multi-position	Ha l f-inch	Rota-slide	Rota-slide	Power Rota-slide	Subminiature Rotary SMT	Subminiature Rotary	Optical Encoder
Miniature					•		•	•	
Low Profile					•		•		
Screwdriver Slot	•	•	•	•	•			•	•
Power						•			
Maximum Current	2.5 Amps	5A/ 1A	6 Amps	5 Amps	4 Amps	12 Amps	0.1 A 10mA	0.5 Amps	30 mA
Poles	1-4	1 - 4 (except 3)	1 & 2	1 & 2	1 & 2	1 & 2	1	1	1
Indexing	30°, 45°, 90°	22.5°, 30° 36°	30° & 36°	36°	45° & 90°	45° & 90°	36° & 45°	45°	
Splashproof	•		•						
Sealed			• F option						
Non-shorting/ Shorting Contacts	•								
Panel Mount Opt	ions								
Front Mount									
Rear Mount	•	•	•	•	•	•			
PCB Mount Option	ons					•			•
Vertical	•	•	•	•	•		•		
Terminations	1	1						1	1
Solder Lug	•	•	•	•	•	•			
Wire Lead				•	•	•			
Quick Connect						•			
PC	•	•	•	•	•		•	•	
Page No.	K-3	K-8	K–13	K-18	K-21	K-25	K-28	K-30	K-33



Features/Benefits

- Multi-pole and multi-position
- Positive detent
- Shorting & non-shorting contacts
- Panel and PCB mounting
- RoHS Compliant



Models Available

Typical Applications

- Automotive
- Major and small appliances
- Industrial equipment



KSD-A Series 1-4

Pole Rotary Switches

Specifications

CONTACT RATING: Q contact material: Switch - 2.5 AMPS @ 125 V AC; 1 AMP @ 250 V AC; 350 mA @ 125 V DC (UL/CSA). Carry - 5 AMPS continuous. See page K-6 for additional ratings.

ELECTRICAL LIFE: Up to 15,000 make-and-break cycles at full load up to 300,000 detent operations.

CONTACT RESISTANCE: Below 20 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts. INSULATION RESISTANCE: 10 9 Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level. Operating and storage temp: -30° to 85°C

OPERATING & STORAGE TEMPERATURE: -30°C to 85°C

NOTE: Any models supplied with Q, B or G contact material are RoHS compliant.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

HOUSING & BUSHING: Glass filled 6/6 nylon (UL 94V-0).

ACTUATOR: Glass filled 6/6 nylon (UL 94V-0).

MOVABLE CONTACTS: Q contact material: Coin silver, silver plated. See page K-6 for additional contact materials.


STATIONARY CONTACTS & TERMINALS: Q contact material: Brass, silver plated. See page K-6 for additional contact materials.

HARDWARE: Nut - zinc, nickel plated. Lockwasher — steel, bright zinc plated. Stop Ring - brass, nickel plated.

TERMINAL SEAL: Epoxy.


Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K–4 through K–7. For additional options not shown in catalog, consult Customer Service Center.

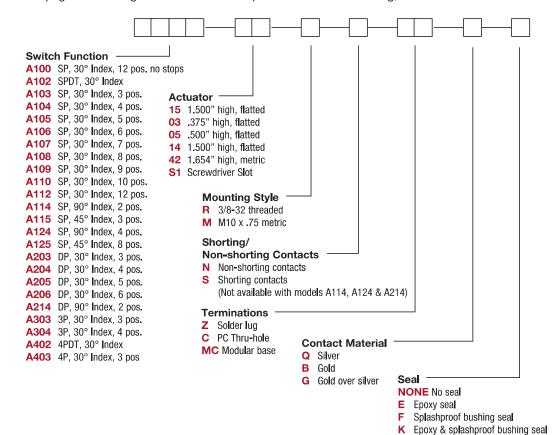


SWITCH FUNCTION




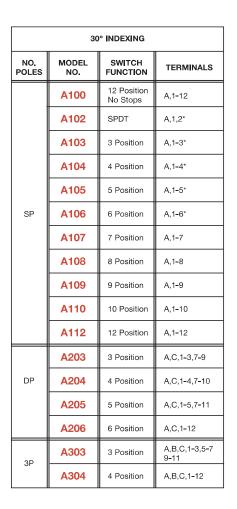


1 2 3 4 5 6 7 8 9 1011	

SP MODELS SCHEMATIC







30° INDEXING							
NO. POLES	MODEL NO.	SWITCH FUNCTION	TERMINALS				
4P	A402	4PDT	A,B,C,D,1,2,4,5,7, 8,10,11				
	A403	3 Position	All Terminals				

45° INDEXING							
NO. POLES	MODEL NO.	SWITCH FUNCTION	TERMINALS				
SP	A115	3 Position	A,1,2,4*				
	A125	8 Position	A,1,2,4,5,7,8,10,11				

90° INDEXING							
NO. POLES	MODEL NO.	SWITCH FUNCTION	TERMINALS				
SP	A114	2 Position	A,1,4*				
OI .	A124	4 Position	A,1,4,7,10				
DP	A214	2 Position	A,C,1,4,7,10				


TERMINAL NUMBERS

Terminal numbers molded on bottom of housing.



4P MODELS SP MODELS (omit terminals B, C & D) DP MODELS (omit terminals B & D)


3P MODELS



NOTE: * These models with 'C' or 'MC' terminations have additional terminal no. 9

as switch support only. This terminal is not connected electrically inside switch.

All models $_{\mbox{c}}$ with all options when ordered with 'G' or 'Q' contact material, see page K-6.











15 1.500" HIGH

KSD-A Series 1-4 Pole Rotary Switches

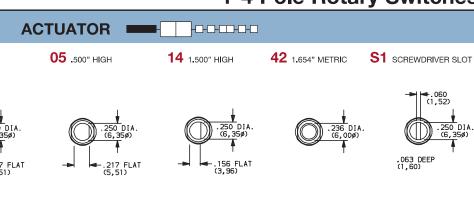















NOTE: Actuators shown in position 1, fully CCW.










Maximum force to push on knob should not exceed 10 lbs. NUT LOCKWASHER

TYPICAL INSTALLATION






PANEL MOUNTING



3/8 IN. BUSHING

PANEL MOUNTING



METRIC BUSHING

Install switch with stop ring (if used) and lockwasher in back of panel. Tighten hex nut from front of panel.

On PC mounted switches, use hex nut and lockwasher to hold stop ring in place.

Actuation torque: 8–16 oz./in. Maximum torque: 30 oz./in.

SHORTING/NON-SHORTING CONTACTS

NON-SHORTING CONTACTS (break-before-make)

S SHORTING CONTACTS (make-before-break)






KSD-A Series 1-4 Pole Rotary Switches



TERMINATIONS









C PC THRU-HOLE

MC MODULAR BASE (for wave soldering)

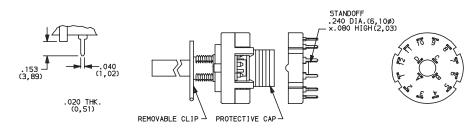


NOTE: Switches with 'C' or 'MC' terminations have additional terminal no. 9 as switch support only. This terminal is not connected electrically inside switch. Solder and clean switch base on PC board with other components, then snap on housing/actuator assembly. See page K-7 for installation instructions.

PC MOUNTING




4P MODEL SP MODEL (omit terminals B, C & D)
DP MODEL (omit terminals B & D)



3P MODEL

CONTACT MATERIAL

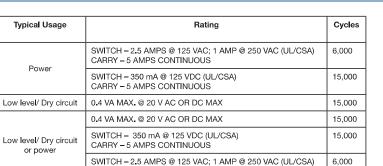

CARRY - 5 AMPS CONTINUOUS

Contact & Terminal

Material

Silver²

Gold¹

Gold over silver³

Option

Code

Q

В

G

- MOVABLE CONTACTS: Copper alloy, with gold plate over nickel plate.
 STATIONARY CONTACTS & TERMINALS: Brass, with gold plate over nickel plate.
 MOVABLE CONTACTS: Coin silver, silver plated.
 STATIONARY CONTACTS & TERMINALS: Brass, silver plated (standard with all
- termination options).

 MOVABLE CONTACTS: Coin silver, with gold plate over nickel plate over silver plate. STATIONARY CONTACTS & TERMINALS: Brass, with gold plate over nickel plate over silver plate.

NOTE: Any models supplied with Q, B or G contact material are RoHS compliant.

All models c with all options when ordered with 'G' or 'Q' contact material. NOTE: 'G' contact material is equivalent to both 'B' and 'Q" contact materials.



^{*} Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.




NONE NO SEAL


KSD-A Series 1-4 Pole Rotary Switches

K EPOXY & SPLASHPROOF BUSHING SEAL

F SPLASHPROOF BUSHING SEAL



E FPOXY SEAL



Setting Stops on A112 and A125 Models

The number of switch positions is adjustable on A112 and A125 models only by means of a stop ring provided with each switch. The number of positions is pre-set on all other models and the stop ring is factory installed.

To set stops: Turn shaft fully counter-clockwise and insert stop ring tab in desired hole. Install lockwasher and nut to retain stop ring for both PC and panel mounting. Switch without stop ring has 12 positions.

Soldering, Cleaning and Assembly Instructions for 'MC' Termination Option

Soldering


- 1. Insert switch base only into PC board.
- 2. Do not bend terminals.
- 3. Wave soldering recommended at 500F solder temperature.
- 4. Hand solder at 500F, 10 sec. max./terminal.

Switch Assembly

- 1. Hold housing/shaft assembly by housing. Remove protective cap by squeezing tabs and discard. (FIG. 1)
- 2. Do not push on switch shaft. Detent mechanism will come apart.
- 3. While holding switch housing, align locating tab on base with notch on housing and engage 4 housing latches in slots on base. (FIG. 2)
- 4. Push firmly on housing until latches snap in place.
- 5. Remove clip from shaft and discard. Assembly is complete. (FIG. 3)


Cleaning

- 1. Flux clean using vapor degreaser and forced rinse or triple bath method.
- 2. Do not allow switch base to 'trap' fluids.
- 3. Freon TMC, TF or Methylene Chloride give excellent results.

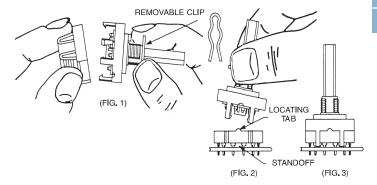

AVAILABLE HARDWARE

Stop ring



PART NO. 767B00201

Material: Brass







Features/Benefits

- PCB or hand soldering versions
- Bushing mounting
- Multiple poles
- Decimal and hexadecimal codes
- Screwdriver slot or extended actuator
- RoHS Compliant

Typical Applications

- Appliances
- Electronic alarm systems
- Medical
- Building automation
- HVAC air conditioning

Electrical Data	Silver	Gold
SWITCHING MODE:	BBM	BBM
MAX. SWITCHING POWER	5 VA	0.5 VA
MAX. SWITCHING CURRENT:	150 mA	20 mA
MAX. CARRYING CURRENT:	5 A	1 A
NOMINAL VOLTAGE AT 50 Hz	60 V	25 V
CONTACT RESISTANCE:	$<$ 150 $m\Omega$	$<$ 150 $m\Omega$
DIELECTRIC STRENGTH AT 50 Hz BETWEEN CONTACTS AND GROUND TERMINALS:	500 V r	500 V r
INSULATION RESISTANCE BETWE CONTACTS OR CONTACTS AND FRAME (500 V =):	EN 10° O	10° O
NO. OF OPERATIONS:	10,000	10,000
BOUNCE:	< 5 ms	< 5 ms

Mechanical Data

MAX. NO. OF BANKS: 1.

OPERATING TORQUE: 5 Ncm±20%. END STOP TORQUE: 50 Ncm. minimum STOP: With/without or adjustable

FIOP: With/without or adjustable

MOUNTING: By fixed index 9.5 mm (0.374) of center, for

bushing mount only

Materials

BUSHING/HOUSING: PETP Thermoplastic

STATIONARY CONTACTS & TERMINALS: Nickel Plated Brass

with additional plating of Gold or Silver. ROTOR: Gold or Silver plated Brass or PCB.

CODING PLATE: PA thermoplastic ACTUATOR: Polysulfon thermoplastic

HARDWARE: Stop pin: Aluminum. Ball & Spring: Stainless steel.

Washer: PA. Nut: Brass.


Environmental Data

OPERATING TEMPERATURE: -20°C to + 70°C -20°C to + 70°C STORAGE TEMPERATURE: -40°C to + 85°C -40°C to + 85°C


NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch


To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-9 thru K-12. For additional options not shown in catalog, consult Customer Service Center.

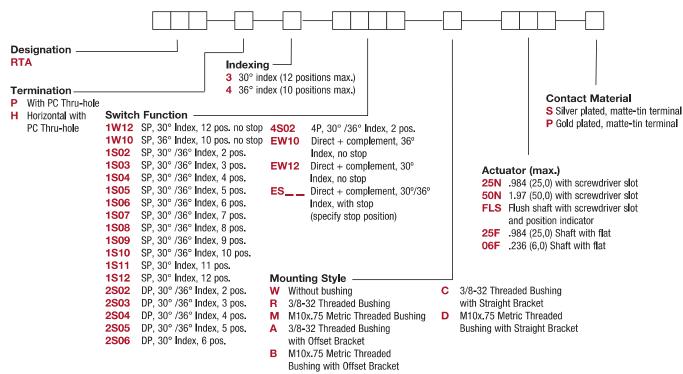







RTA



TERMINATION -------

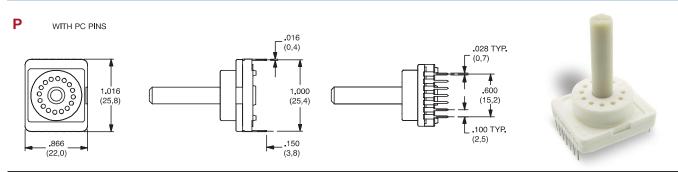

Horizontal with PC Thru-hole

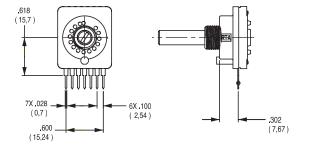


Note: "H" termination only available with the following options: 1. With A or B mounting styles

- 2. 36° degree indexing3. Up to 5 positions max

3 30 index, 12 positions max.

36 index, 10 positions max.

Both commons must be connected by user to ground.



EW10


EW12

ES_



SWITCH FUNCTION ----



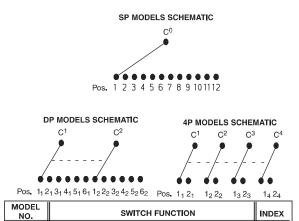

Direct + complement, with stop (specify stop position)

Direct + complement, No stop

Direct + complement, No stop

NO. POLES	MODEL NO.	SWITCH FUNCTION	INDEX
	2W05	5 Positions No Stop	30°/36°
	2W06	6 Positions No Stop	30°
DP	2802	2 Positions	30°/36°
	2803	3 Positions	30°/36°
	2S04	4 Positions	30°/36°
	2805	5 Positions	30°/36°
	2806	6 Positions	30°
4P	4\$02	2 Positions	30°/36°


30°	36°																	
Term.	Term.	Pos.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
M,N	L,N	С	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Н	D	1		•		•		•		•		•		•		•		•
D	В	2			•	•			•	•			•	•			•	•
Α		4					•	•	•	•					•	•	•	•
J	J	8									•	•	•	•	•	•	٠	•
С	К	1	•		•		•		•		•		•		•		•	
К	Н	2	•	•			•	•			•	•			•	•		
В	Α	4	•	•	•	•					•	•	•	•				
I	С	8	•	•	•	•	•	•	•	•								

36


30°

30° & 36°

Indexing Option Code 3, 30 INDEXING ANGLE PCB LAYOUT

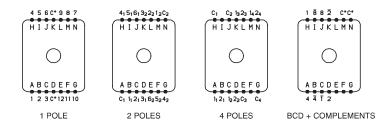


Indexing Option Code 4, 36 INDEXING ANGLE PCB LAYOUT

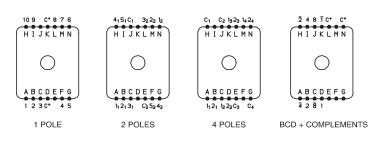

NOTE: Layout view from component side.


Common terminals that are in locations A-G are not connected to common terminals that are in locations H-N. For 7-12 position output customer must tie these commons together.













Note: W mounting style not available with H termination.

M M10 x .75 MERTIC THREADED BUSHING

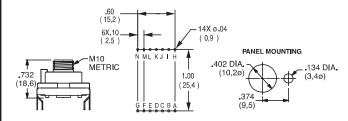


Note: M mounting style not available with H termination.

R 3/8-32 THREADED BUSHING

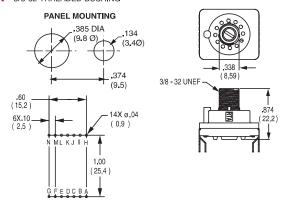


Note: R mounting style not available with H termination.

A 3/8-32 THREADED BUSHING WITH BRACKET

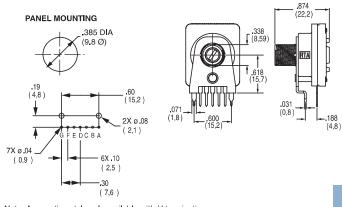


Note: A mounting style only available with H termination.

B M10 x .75 METRIC THREADED BUSHING WITH BRACKET

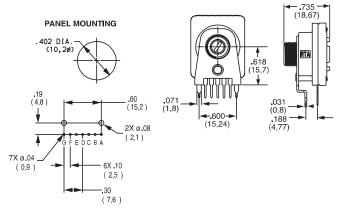


Note: B mounting style only available with H termination.

C 3/8-32 THREADED BUSHING WITH STRAIGHT BRACKET

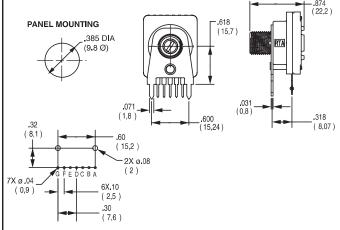


M10 x .75 METRIC THREADED BUSHING WITH STRAIGHT BRACKET

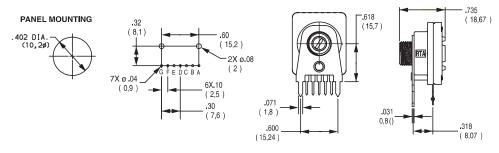



Specifications and dimensions subject to change



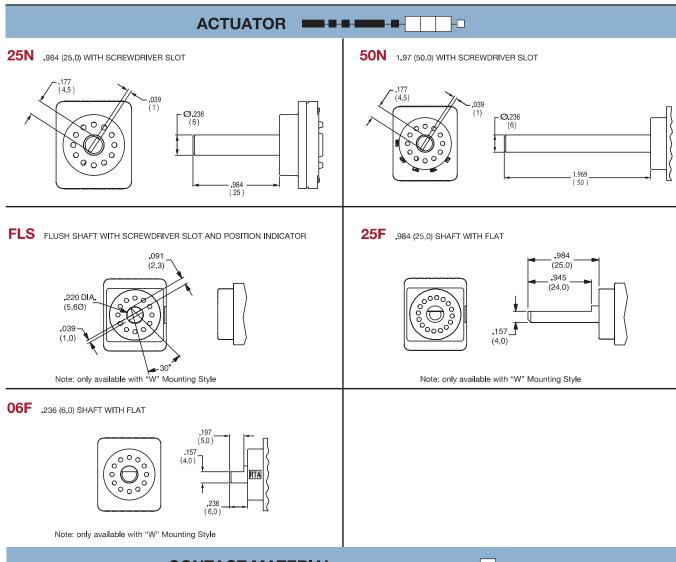


CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATING					
S	SILVER	LOW LEVEL/DRY CIRCUIT	SWITCH: 150 mA MAXIMUM, 60 V NOMINAL. POWER: 5 VA MAXIMUM. CARRY-5 AMPS MAXIMUM.				
Р	GOLD	LOW LEVEL/DRY CIRCUIT OR POWER	SWITCH: 20 mA MAXIMUM, 25 V NOMINAL. POWER: 0.5 VA MAXIMUM. CARRY: 1 AMP MAXIMUM.				

^{*} Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.



NOTE: Additional nuts and lockwashers available separately, see section "Technical Data and Additional Hardware".





Features/Benefits

- Multi-pole and multi-positions
- Panel and PCB mounting
- Stainless steel actuator
- Non-shorting contacts
- RoHS Compliant
- IP67 (F option only)

Typical Applications

- Test equipment
- Industrial equipment
- Medical equipment





Specifications

CONTACT RATING: Q contact material: Carry-6 AMPS continuous. Switch-250 mA max. @ 125 V AC or 28 DC. Non-shorting contacts standard. See page K-16 for additional ratings.

ELECTRICAL LIFE: 10,000 make-and-break cycles at 150 mA, 125 V AC or 28 DC.

CONTACT RESISTANCE: Below 20 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts. INSULATION RESISTANCE: 10¹⁰ Ω min.

DIELECTRIC STRENGTH: 600 Vrms min. @ sea level.

OPERATING & STORAGE TEMPERATURE: -30°C to 85°C.

OPERATING TORQUE: 4-7 ounces-inches typ. initial.

SOLDERABILITY: Per MIL-STD-202F method 208D, or

EIA RS-186E method 9 (1 hour steam aging).

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

HOUSING AND BUSHING: Zinc alloy, bright zinc plated, with clear chromate finish.

ACTUATOR: Zinc alloy, nickel plated or stainless steel.

BASE: Diallylphthalate (DAP) or melamine phenolic, with insert molded terminals.

ROTOR: Glass filled polyester (UL 94V-0).

MOVABLE CONTACTS:

Non-shorting: Q contact material: Copper alloy, silver plated. See page K-16 for additional contact materials.

STATIONARY CONTACT & ALL TERMINALS: Q contact material: Copper alloy, silver plated. All terminals insert molded. All terminals present regardless of number of switch positions. See page K-16 for additional contact materials.

CONTACT SPRING: Music wire, phosphate coated.

STOP PIN: Stainless steel.


STOP RING: Brass.

HARDWARE: Nut: Brass, nickel plated; Lockwasher: Steel,

nickel plated.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-14 thru K-17. For additional options not shown in catalog, consult Customer Service Center.

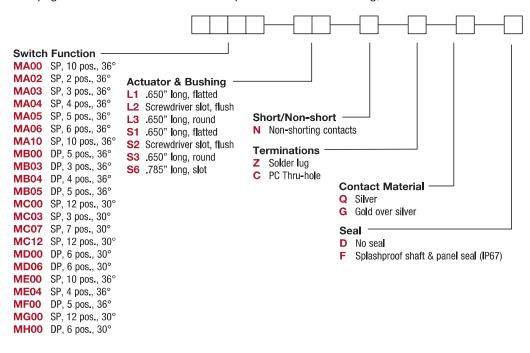



SWITCH FUNCTION -----


36° INDEXING							
NO. POLES	MODEL NO. WITH STOP PINS	SWITCH FUNCTION					
	MA00	10 Positions No Stops					
	MA02	_	2 Positions				
SP	MA03	_	3 Positions				
	MA04	ME04	4 Positions				
	MA05	_	5 Positions				
	MA06	_	6 Positions				
	MA10	_	10 Positions				
	MB00	MF00	5 Positions No Stops				
	MB03		3 Positions				
DP	MB04	_	4 Positions				
	MB05	_	5 Positions				

SP MODELS 36° INDEXING SCHEMATIC					
Å					
1 2 3 4 5 6 7 8 9 10					

DP MODELS 36° INDEXING SCHEMATIC



SP MODELS 30° INDEXING SCHEMATIC




DP MODELS 30° INDEXING SCHEMATIC




30° INDEXING MODEL NO. WITH STOP MODEL NO. NO. WITH STOP SWITCH POLES RINGS FUNCTION 12 Positions MC00 **MG00** No Stops MC03 3 Positions SP **MC**07 7 Positions MC12 12 Positions 6 Positions **MD**00 **MH00** No Stops DP MD06 6 Positions

All models cNus with all options when ordered with S1-S6 stainless steel actuator options.

NOTE: Number of positions or stops preset at factory (NOTE: MX00 models have full 360 rotation with no stops. Stop pins or stop rings supplied for user-selectable stops, see above). All terminals present regardless of number of switch positions. Hardware is available separately, see section "Technical Data and Additional Hardware".

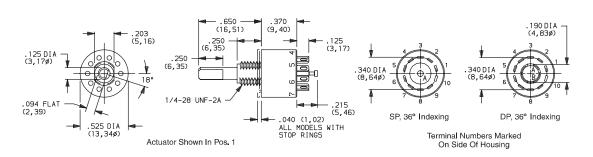

Part number shown: MA00L1NZQD

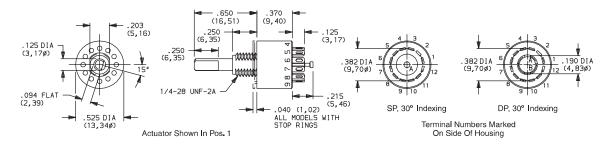


Part number shown: MC00L1NZQD






ACTUATOR (ZINC ALLOY)


L1 .650" LONG, FLATTED

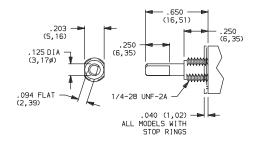

L2 SCREWDRIVER SLOT, FLUSH




L3 .650" LONG, ROUND




All actuators shown in pos. 1

ACTUATOR (STAINLESS STEEL)


\$1 .650" LONG, FLATTED




\$2 SCREWDRIVER SLOT, FLUSH



\$3 .650" LONG, ROUND



\$6 .785" LONG, SLOT



All actuators shown in pos. 1

All models cMus when ordered with stainless steel actuators.







SHORTING/NON-SHORTING CONTACTS ---


NON-SHORTING CONTACTS

Break-before-make


TERMINATIONS Z SOLDER LUG C PC THRU-HOLE

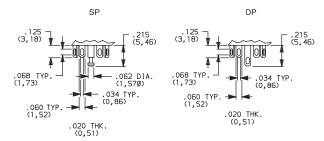






PANEL MOUNTING

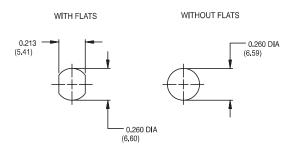








* Will withstand 12 in. - Ibs of torque with no distortion.

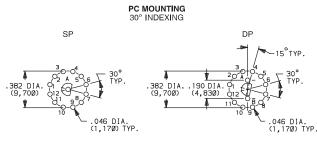

NOTE: Q contact material standard. Terminal numbers marked on side of housing. All terminals insert molded. All terminals present regardless of number of switch positions.

Actuators and schematics shown in pos. 1.

CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATING						
Q	SILVER 1, 2	SILVER ²	POWER	CARRY: 6 AMPS CONTINUOUS, SWITCH: 250 mA @ 125 V AC or 28 V DC.					
G	GOLD OVER SILVER ^{3, 4}	GOLD ⁴	LOW LEVEL/DRY CIRCUIT OR POWER	0.4 VA MAX. @ 20 V AC or DC MAX. or, CARRY: 6 AMPS CONTINUOUS, SWITCH: 250 mA @ 125 V AC or 28 V DC.					

^{*} Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

- ¹ MOVABLE CONTACTS: Non-shorting: Copper alloy, silver plated.
- 2 STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, silver plated.
- ³ MOVABLE CONTACTS: Non-shorting: Copper alloy, with gold plate over nickel plate, over silver plate.
- ⁴ STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate over silver plate.

NOTE: Any models supplied with Q, G contact material are RoHS compliant.


All models c when ordered with S1-S6 stainless steel actuator options.





SEAL ---



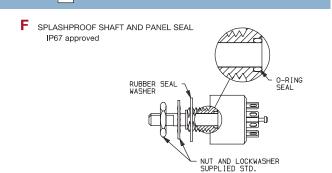

Setting Stops With Stop Pins

MA00, MB00, MC00 & MD00 Models Only:


The number of switch positions or stops are adjustable by means of stop pins provided with each switch. Switches are normally shipped with stop pins and hardware in bulk, not installed. Without stop pins, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more.

To set stops, refer to figures 1 & 2. Orient switch so that terminal no. 1 is as shown. Turn actuator to position 1, using flats on bushing and terminal no. 1 as reference. Install CCW stop pin in hole designated 'X'. Install second stop pin in hole number corresponding to the number of positions desired. Note that two pole models will begin to repeat when actuated 180° or more. To retain stop pins, use adhesive mylar washer included; see figure 3.

All models except MX00 models have number of switch positions or stops pre-set at factory and are not adjustable.

Hardware:

Two stop pins, mounting nut, and lockwasher supplied standard.

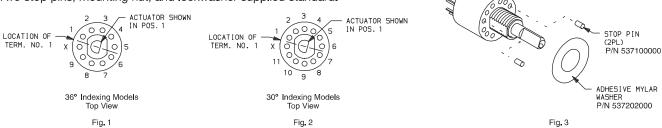

Setting Stops With Stop Rings

ME00, MF00, MG00 & MH00 Models Only:

The number of switch positions or stops are adjustable by means of stop rings provided with each switch. These models are normally shipped with stop rings and hardware in bulk, not installed. Without stop rings, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more.

To set stops refer to figures 4 & 5. Orient switch so that terminal no. 1 is as shown. Turn actuator to pos. 1 using flats on bushing


and terminal no. 1 as reference. See figure 6 and install inner stop ring with short tab in hole designated 'X'. <u>Install outer stop ring with long tab</u> in hole number corresponding to the number of positions desired. Note that all two pole models begin to repeat when actuated 180° or more. Use mounting nut and lockwasher to retain stop rings.


All MEXX, MFXX, MGXX & MHXX Models (Except MX00 models):

Number of switch positions or stops are preset at factory, but are user adjustable.

Hardware:

Two stop rings, mounting nut and lockwasher supplied standard.

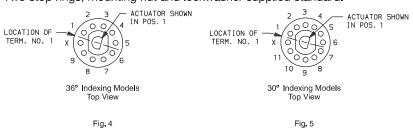







Features/Benefits

- Multi-pole and multi-position
- Positive detent
- Panel and PCB mounting
- Enclosed
- RoHS Compliant

Typical Applications

- Ceiling fans
- Industrial equipment
- Portable tools

Specifications

CONTACT RATING: Q contact material: 5 AMPS @ 125 V AC; 2.5 AMPS @ 250 V AC; 0.5 AMP @ 125 V DC; 1/8 HP @ 125 and 250 VAC (UL/CSA).

See page K-20 for additional ratings.

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load. CONTACT RESISTANCE: Below 10 m Ω typ. initial @ 2-4 V DC,

100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

INDEXING: 36°-one contact models, 10 position max.; two contact

models, 5 position max.

OPERATING & STORAGE TEMPERATURE: -30°C to 95°C

Materials

HOUSING & BUSHING: 6/6 nylon (UL 94V-2).

ACTUATOR: 6/6 nylon (UL 94V-2).

CONTACTS & TERMINALS: Q contact material: Copper, silver plated.

See page K-20 for additional contact materials. CONTACT SPRING: Music wire or stainless steel.

MOUNTING NUT: Steel, zinc plated.


TERMINAL SEAL: Epoxy.

NOTE: Any models supplied with Q or B contact material are RoHS compliant.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Custome Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-19 and K-20. For additional options not shown in catalog, consult Customer Service Center.

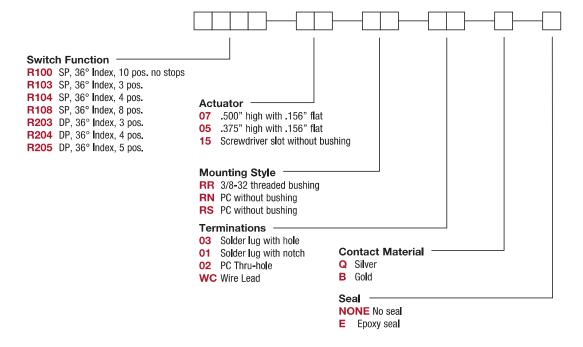




KSD-R Series ROTA-SLIDE® Rotary Switches

SP MODELS 36° INDEXING				
NO. POLES	MODEL SWITCH FUNCTION		TERMINALS	
	R100	10 Position No Stops	All Terminals	
SP	R103	3 Position	10-1-2-3	
	R104	4 Position	10-1-2-3-4	
	R108	8 Position	10-1-2-3-4-5-6-7-8	


All models call with all options when ordered with 'Q' contact material.

SP MODELS 36° INDEXING SCHEMATIC





DP MODELS 36° INDEXING				
NO. POLES	MODEL SWITCH FUNCTION		TERMINALS	
	R203	3 Position	10-1-2-3,5-6-7-8	
DP	R204	4 Position	All Terminals	
	R205	5 Position	All Terminals	

DP MODELS 36° INDEXING SCHEMATIC



NOTE: Break-before-make contacts. Actuators and contacts are shown in position 1. No common terminal is present. Switching function is provided by movable contacts shorting adjacent pairs of stationary contacts.







TERM. NOS. MOLDED ON HOUSING

Part number show: R10007RR03Q


ACTUATOR -




07 .50019" HIGH WITH .156" FLAT

05 .375"19 HIGH WITH .156" FLAT






Shown with 'RR' mounting style. For mounting styles without bushing, add .250 (6,35) to actuator length.




Shown with 'RN' mounting style.



Arrow on actuator marked red (std.). Shown with 'RS' mounting style.



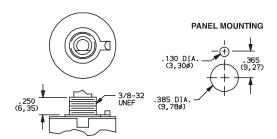









Position numbers and characters are molded on housing.

Mounting nut included (part number 175000100).


TERMINATIONS ---


03 SOLDER LUG WITH HOLE


01 SOLDER LUG WITH NOTCH


02 PC THRU-HOLE

WC WIRE LEAD









CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL		RATING
Q	SILVER ²	POWER	5 AMPS @ 125 V AC; 2.5 AMPS @ 250 V AC; 0.5 AMP @ 125 V DC (UL/CSA); 1/8 HP @ 125 and 250 VAC (UL/CSA).
В	GOLD ¹	LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC or DC MAX.

- * Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.
- 1 CONTACTS & TERMINALS: Copper, with gold plate over nickel plate. 2 CONTACTS & TERMINALS: Copper, silver plated. (Standard with all

termination options.)

NOTE: Any models supplied with Q, B or G contact material are RoHS compliant,

All models c with all options when ordered with 'Q' contact material.

SEAL

NONE NO SEAL

E EPOXY SEAL





Specifications and dimensions subject to change





KSD-F Series Miniature ROTA-SLIDE® Rotary Switches

Features/Benefits

- Multi-pole and multi-position
- Panel and PCB mounting
- Positive detent
- Value added capability
- RoHS Compliant

Typical Applications

- Small appliances
- Testing fixtures
- Safety equipment





Specifications

CONTACT RATING: Q contact material: 4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC (UL/CSA). See page K-24 for additional ratings.

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

CONTACT RESISTANCE: Below 10 m Ω typ. initial @

2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: $10^9~\Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

INDEXING: 45° or 90° -one contact models; two contact models, 4 pos. max. Models with common terminal -90°, 4 pos. max.

OPERATING & STORAGE TEMPERATURE: -30°C to 65°C

Materials

HOUSING & BUSHING: 6/6 Nylon (UL 94V-2).

ACTUATOR: 6/6 nylon (UL 94V-2).

CONTACTS: Q contact material: Copper, silver plated. See page

K-24 for additional contact materials.

TERMINALS: Q contact material: Copper, silver plated. See page

K-24 for additional contact materials.

CONTACT SPRING: Music wire or stainless steel.

MOUNTING NUT: Brass, nickel plated.


TERMINAL SEAL: Epoxy.

NOTE: Any models supplied with Q or B contact material are RoHS compliant.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Custome Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-22 thru K-24. For additional options not shown in catalog, consult Customer Service Center.

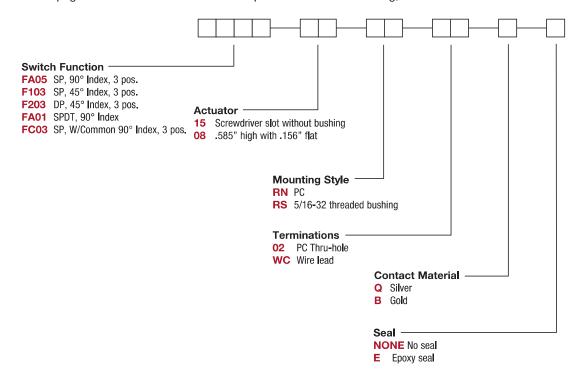



KSD-F Series Miniature ROTA-SLIDE® Rotary Switches



45° INDEXING				
NO. POLES	MODEL NO.	SWITCH FUNCTION	TERMINALS	
SP	F103	3 Position	8-1-2-3*	
DP	F203	3 Position	All Terminals	

45° INDEXING SCHEMATICS





F1XX MODELS

F2XX MODELS


Break-before-make contacts. Terminal numbers are molded on bottom of housing. Actuators are shown in position 1.


F1XX, F2XX models: No common terminal is present. Switching function is provided by movable contacts shorting adjacent pairs of stationary contacts.

NOTE: *Switches with '02' PC terminations have additional terminal no, 5 as switch support only. This terminal is not connected electrically inside switch.


90° INDEXING				
NO. POLES	MODEL NO.	SWITCH FUNCTION	TERMINALS	
SP	FA01	SPDT	8-1-3	
SP	FA05	3 Position	8-1-3-5	
SP WITH COMMON	FC03	3 Position	C-1,C-2,C-3	

90º INDEXING SCHEMATICS





FA01 MODEL




FCXX MODEL


Break-before-make contacts. Terminal numbers are molded on bottom of housing. Actuators are shown in position 1.

FAXX models: No common terminal is present. Switching function is provided by movable contacts shorting adjacent pairs of stationary contacts.


FCXX models: Common terminal is present.

NOTE: *Switches with '02' PC terminations have additional terminal no. 5 as switch support only. This terminal is not connected electrically inside switch.

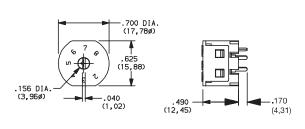




Part number show: FC0315RN02Q



KSD-F Series Miniature ROTA-SLIDE® **Rotary Switches**


ACTUATOR 1-----

15 SCREWDRIVER SLOT WITHOUT BUSHING



Shown with 'RN' mounting style; not available with 'RS' mounting style or FCXX models.

08 .585" HIGH WITH .156" FLA



Must be ordered with 'RS' mounting style.


MOUNTING STYLE ----

RN PC






PC mount, no bushing, position numbers molded standard. Shown with '15' actuator; not available with '08' actuator or FCXX models. RS 5/16-32 THREADED BUSHING



Panel mount, with 5/16 in.-32 threaded bushing. Mounting nut (P/N 175020201) included. Must be ordered with '08' actuator option.

PANEL MOUNTING




5/16 IN. BUSHING

TERMINATIONS -0-0

02 PC THRU-HOLE



WC WIRE LEAD



Black wire standard, other colors and lengths available, consult Customer Service Center. UL style 1015.

F1XX, F2XX & FAXX Models

02 PC THRU-HOLE



FCXX Models



PC MOUNTING



Specifications and dimensions subject to change

KSD-F Series Miniature ROTA-SLIDE® Rotary Switches



CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATING	
Q	SILVER ²	POWER	4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC (UL/CSA).
В	GOLD ¹	LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC or DC MAX.

^{*} Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

 1 CONTACTS & TERMINALS: Copper, with gold plate over nickel plate, 2 CONTACTS & TERMINALS: Copper, silver plated (standard with all termination options).

NOTE: Any models supplied with Q or B contact material are RoHS compliant.

All models




with all options when ordered with 'Q' contact material.

SEAL

NONE NO SEAL

E EPOXY SEAL



Not available on FCXX models.



H Series Power ROTA-SLIDE® Rotary Switches

Features/Benefits

- Multi-pole and multi-position
- Positive detent
- Power switching up to 12 AMPS
- Value added capability
- RoHS Compliant

Typical Applications

- Small appliances
- Industrial equipment
- Elevators





Specifications

CONTACT RATING: 12 Amps @ 125 V AC; 6 AMPS @ 250 V AC; 1 AMP @ 125 V DC (UL/CSA).

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

INDEXING: 45° -one contact models, 8 positions max.; two contact

models, 4 positions max.

OPERATING & STORAGE TEMPERATURE: -30°C to 95°C

NOTE: Any models supplied with Q, B or G contact material are RoHS compliant.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

HOUSING & BUSHING: 6/6 nylon (UL 94V-2).

ACTUATOR: 6/6 nylon (UL 94V-2).


CONTACTS & TERMINALS: Copper, silver plated. CONTACT SPRING: Music wire or stainless steel.

MOUNTING NUT: Steel, zinc plated.

TERMINAL SEAL: Epoxy.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-26 thru K-27. For additional options not shown in catalog, consult Customer Service Center.

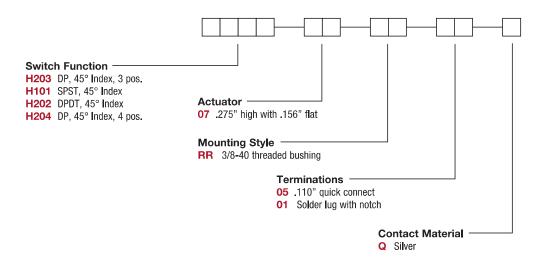


SWITCH FUNCTION

|--|--|--|--|--|


SP MODELS 45° INDEXING				
NO. POLES	MODEL NO.	SWITCH FUNCTION	TERMINALS	
SP	H101	SPST	8-1	

DP MODELS 45° INDEXING			
NO. POLES	MODEL SWITCH FUNCTION		TERMINALS
	H202	DPDT	7-8-1, 3-4-5
DP	H203	3 Position	All Terminals
	H204	4 Position	All Terminals

SP MODELS 45° INDEXING SCHEMATIC



DP MODELS 45° INDEXING SCHEMATIC





NOTE: Break-before-make contacts. Terminal numbers are molded on bottom of housing. Actuators and contacts are shown in position 1. No common terminal is present. Switching function is provided by movable contacts shorting adjacent pairs of stationary contacts.


All models



with all options.







Part number shown: H10107RR05Q

07 .275" HIGH WITH .156" FLAT





ACTUATOR



MOUNTING STYLE ---

RR 3/8-32 THREADED BUSHING







Mounting nut included (part number 925C00000).

TERMINATIONS ----

01 SOLDER LUG WITH NOTCH

05 SOLDER LUG WITH HOLE





Not available on models with 90° indexing.

CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATING	
Q	SILVER 1	POWER	12 AMPS @ 125 V AC; 6 AMPS @ 250 V AC; 1 AMP @ 125 V DC.

 $^{^{\}star}$ Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

NOTE: Any models supplied with Q contact material are RoHS compliant.

All models c with all options.



¹ CONTACTS & TERMINALS: Copper, silver plated.

KSD-RW Series Sub-miniature Rotary Switches







Features/Benefits

- 8 and 10 positions
- SMT version
- Subminiature design

Typical Applications

- Digital cameras
- Audio & visual equipment
- Consumer electronics
- Selector dial interface


How To Order

Part number list is shown below. For individual part details, please refer to the following pages.

Part Number (Part Description)	Product Details	
RW-108 NS RT	8 NS RT 8 Position Subminiature Rotary Switch	
RW-1106-NS RT	10 Position Subminiature Rotary Switch	

PART NUMBER	PACKAGING
RW-108 NS RT	800 pieces per reel



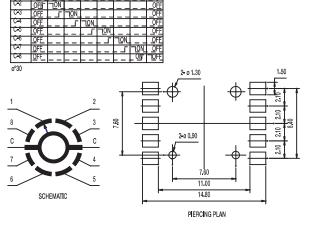

135° 180° 225° 270° 315° 360

Specifications

CONTACT ARRANGEMENT: 1 Pole 8 Position CONTACT RATING: 0.1 A @ 16 V DC. ELECTRICAL LIFE: 10,000 cycles. INITIAL CONTACT RESISTANCE: 100 m Ω max.

INITIAL CONTACT RESISTANCE: 100 m Ω max. INSULATION RESISTANCE: 10M Ω min. DIELECTRIC STRENGTH: 100V (50-60 Hz).

TWIST FORCE: $150 \pm 100 \text{ gf}$

OPERATING TEMPERATURE: -20°C to 70°C


Materials


KNOB: PA (UL 94V-0).

COVER: SUS

HOUSING: PA (UL94V-0) TERMINAL: Silver plated

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center







KSD-RW Series Sub-miniature Rotary Switches

Specifications

CONTACT ARRANGEMENT: 1 Pole, 10 Position

CONTACT RATING: 10 mA @ 5 V DC. ELECTRICAL LIFE: 7,000 cycles.

INITIAL CONTACT RESISTANCE: 200 m Ω max. INSULATION RESISTANCE: 250M Ω min. DIELECTRIC STRENGTH: 250 VAC (50-60 Hz).

TWIST FORCE: 90 ± 15 gf


OPERATING TEMPERATURE: -30°C to 80°C


Materials


KNOB: PA (UL 94V-0). COVER: Silver plated. HOUSING: LCP (UL94V-0) TERMINAL: Silver plated.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer



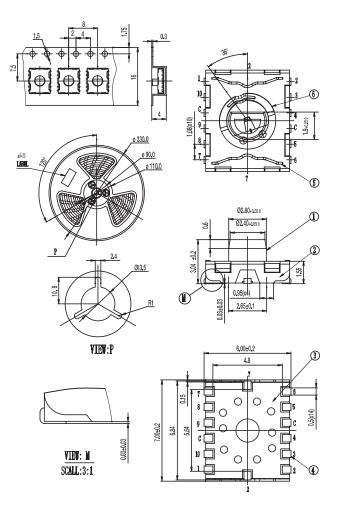





KSD-RM Series Subminiature Rotary Switches





Features/Benefits

- Subminiature design saves space
- Screwdriver slot or extended shaft
- Positive detent
- RoHS compliant

Typical Applications

- Audio & visual equipment
- Consumer electronics
- Telecom equipment

Specifications

CONTACT RATING: 0.5A 24 V DC; 0.2A 48 V DC

OPERATING LIFE: 2,000 cycles

INSULATION RESISTANCE: 100 M Ω min. 500 V DC DIELECTRIC STRENGTH: 500 V AC for 1 minute

OPERATING FORCE: $270 \pm 100 \text{ gf cm}$ OPERATING TEMPERATURE: -40°C to 85°C

Materials

COVER: PA66 BASE: PA6T **ACTUATOR: PA66**


CONTACTS & TERMINALS: Brass with gold plate over nickel plate

SPRING: Brass

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch


To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-30 thru K-32. For additional options not shown in catalog, consult Customer Service Center.

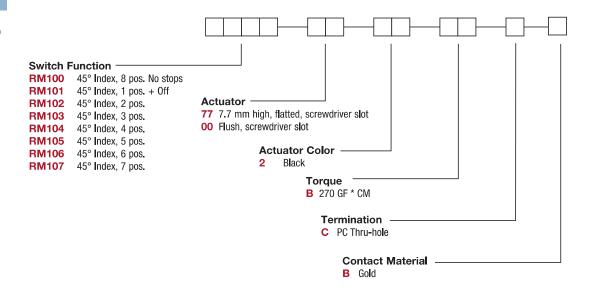





KSD-RM Series Subminiature Rotary Switches


77 7.7 MM HIGH, FLATTED, SCREWDRIVER SLOT



EXTENDED ACTUATOR










00 FLUSH, SCREWDRIVER SLOT

FLUSH ACTUATOR








ELECTRICAL SCHEMATIC - RM SERIES SWITCHES								
SWITCH FUNCTION	TRAVEL POSITION 0°	TRAVEL POSITION 45°	TRAVEL POSITION 90°	TRAVEL POSITION 135°	TRAVEL POSITION 180°	TRAVEL POSITION 225	TRAVEL POSITION 270°	TRAVEL POSITION 315
RM100	C-C(OFF)	C-1	C-2	C-3	C-4	C - 5	C - 6	C-7
RM101	C-C(OFF)	х	х	Х	Х	х	Х	C-7
RM102	Х	C-1	C-2	Х	Х	Х	Х	Х
RM103	Х	C-1	C-2	C - 3	х	х	х	х
RM104	Х	C-1	C-2	C-3	C-4	Х	Х	Х
RM105	Х	C-1	C-2	C - 3	C-4	C - 5	Х	х
RM106	Х	C-1	C-2	C-3	C-4	C-5	C - 6	х
RM107	х	C-1	C-2	C-3	C-4	C-5	C-6	C-7

TERMINAL ID NUMBERS ARE SHOWN FOR REFERENCE ONLY AND ARE NOT MARKED ON BOTTOM OF THE SWITCH




EXTERIOR KEY TAB SHOWN IDENTIFIES "C" (COMMON TERMINAL)


KNOBS


0.2 X 1.5 CHAMFER


297F02000

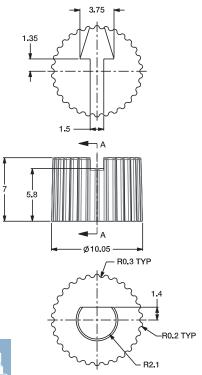


296F02000















Features/Benefits

- Clear detent/haptic feel
- Two channel, 2-bit code output
- Quadrature (Incremental type)
- Integrated pushbutton
- Panel mount with screw thread
- Cable and connector termination

Typical Applications

- Automotive interior control
- Industrial equipment
- Test & Instrumentation
- Medical equipment

Specifications

ROTARY

ELECTRICAL & MECHANICAL

OPERATING VOLTAGE: DC 5 \pm 0.25V, 30mA max.

OUTPUT VOLTAGE: Logic high > 3V DC

Logic Iow < 1V DC

ROTATIONAL TORQUE: 265 gf-cm initially

MECHANICAL LIFE: 300K cycles

PUSHBUTTON

ELECTRICAL & MECHANICAL

OPERATING VOLTAGE: DC 5V, 10mA

INITIAL CONTACT RESISTANCE: 10 ohm max.

ACTUATION FORCE: $600 \pm 20\%$ gf SHAFT TRAVEL: 0.74 ± 0.2 mm

CONTACT BOUNCE: < 4ms make, < 10ms break

MECHANICAL LIFE: 300K cycles

Environmental Data

OPERATING TEMPERATURE: -40°C to +90°C
OPERATING RELATIVE HUMIDITY: <= 96% RH, +40°C


STORAGE TEMPERATURE: -40°C to +90°C

Materials

ACTUATOR: Zinc Alloy HOUSING FRAME: Zinc Alloy DETENT ROTOR: POM, HB DETENT SPRING: SUS HOUSING UPPER: PA66, VO HOUSING LOWER: POM, HB PUSHBUTTON DOME: SUS


Build-A-Switch


Product specifications and technical information listed above are for standard offer on Optical Encoder. For special options and custom request, please contact your sales representative.

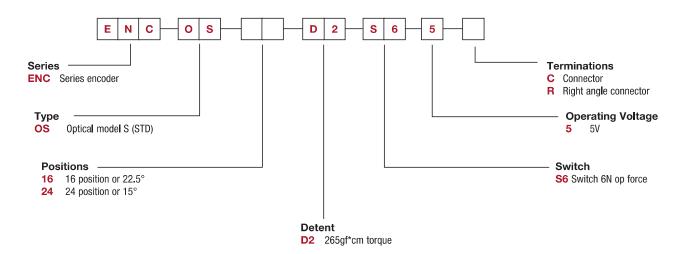





PART NUMBER	PACKAGING	
ENCOS16D2S65C	Tray	









Header Socket









^{*} Note: Recommended connector is JST 06SR-3S







PART NUMBER	PACKAGING	
ENCOS24D2S65R	Tray	

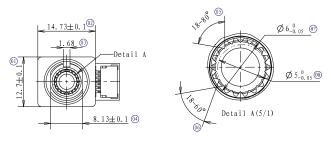

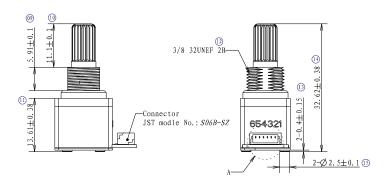

Header Socket

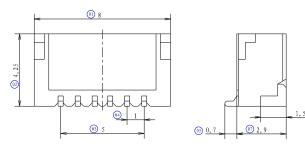



^{*} Note: Recommended connector is JST 06SR-3S






OPERATING CHARACTERISTICS

Output Logic Levels & Voltage by Position

Position	Outp	out A	Output B		
Position	Logic Level	Voltage	Logic Level	Voltage	
1	Low	<1.0	Low	<1.0	
2	High	>3.0	Low	<1.0	
3	High	>3.0	High	>3.0	
4	Low	<1.0	High	>3.0	

 $^{^{\}star}$ Note: Regardless of the number of detents, the outputs repeat every four positions.

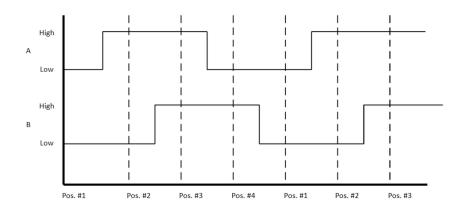

Pinout Order & Function

Pin	Function	
1	Ground	
2	Pushbutton	
3	Pushbutton	
4	Output B	
5	Output A	
6	Power (5V DC)	

