

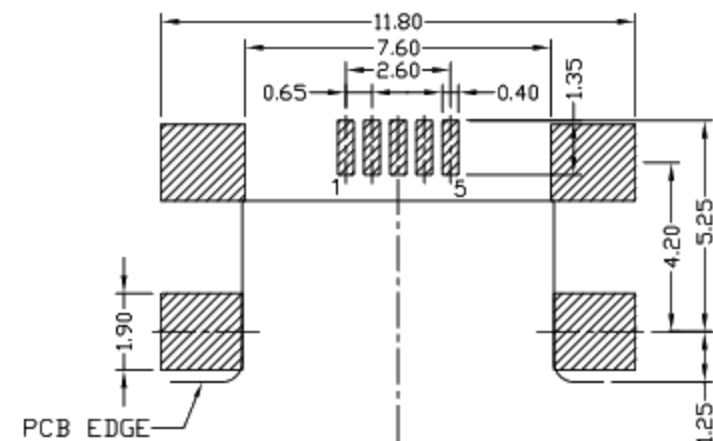
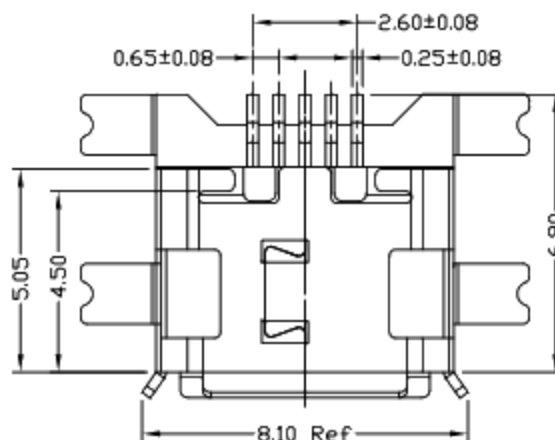
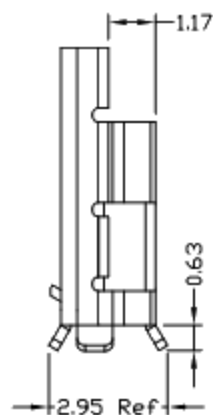


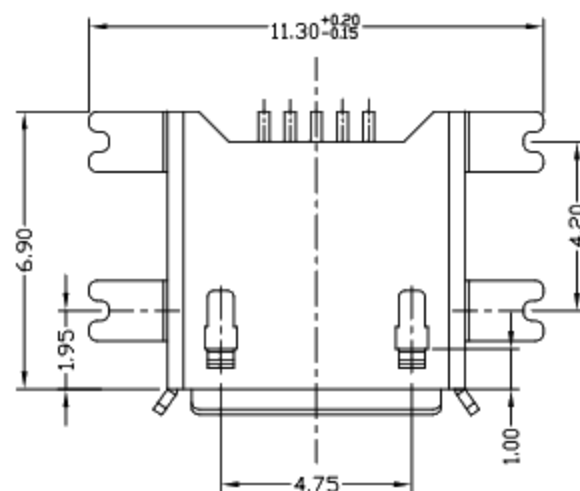


RoHS  
Compliant  
2002/95/EC

Halogen Free

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |

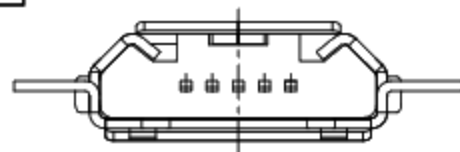

RECOMMENDED PCB LAYOUT

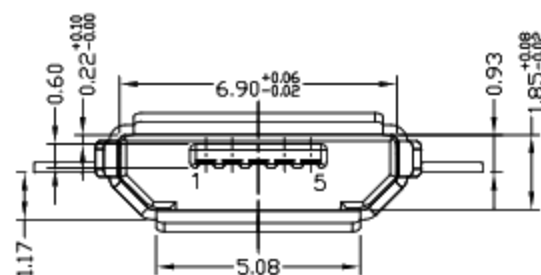

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

1:AU 10"  
6:AU 30U"

T:TIN  
N:NICKEL

W:WHITE  
B:BLACK

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

| NO | PARTS    | MATERIAL     | QTY | FINISHING   | X. ±0.35                                                                                                                                                                                           | X.* ±2'  | UNITS    |
|----|----------|--------------|-----|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|
| 3  | SHELL    | COPPER ALLOY | 1   | PLATED TIN  | .X ±0.30                                                                                                                                                                                           | .X.* ±1' | mm       |
| 2  | HOUSING  | LCP+30%GF    | 1   | UL94V-0     | .XX ±0.25                                                                                                                                                                                          | .XX*     | MAT'L    |
| 1  | TERMINAL | COPPER ALLOY | 5   | PLATED GOLD | .XXX ±0.15                                                                                                                                                                                         | .XXX*    | SEE NOTE |
|    |          |              |     |             | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC. |          | FINISH   |
|    |          |              |     |             |                                                                                                                                                                                                    |          | SEE NOTE |
|    |          |              |     |             |                                                                                                                                                                                                    |          | Q'TY     |
|    |          |              |     |             |                                                                                                                                                                                                    |          | SEE NOTE |

廣東科斯達電子科技有限公司

TITLE: MICRO USB B TYPE F 5P SWT  
威板式1.17 四脚全貼

DR: Ricky 2018/5/10

CHKD: Ricky 2018/5/10

APPD:

PART NO.:

DWG NO.:

| SCALE | SHEET | REV. | CUSTOMER DRAWING |
|-------|-------|------|------------------|
| 5:1   | 1/1   | A    |                  |