
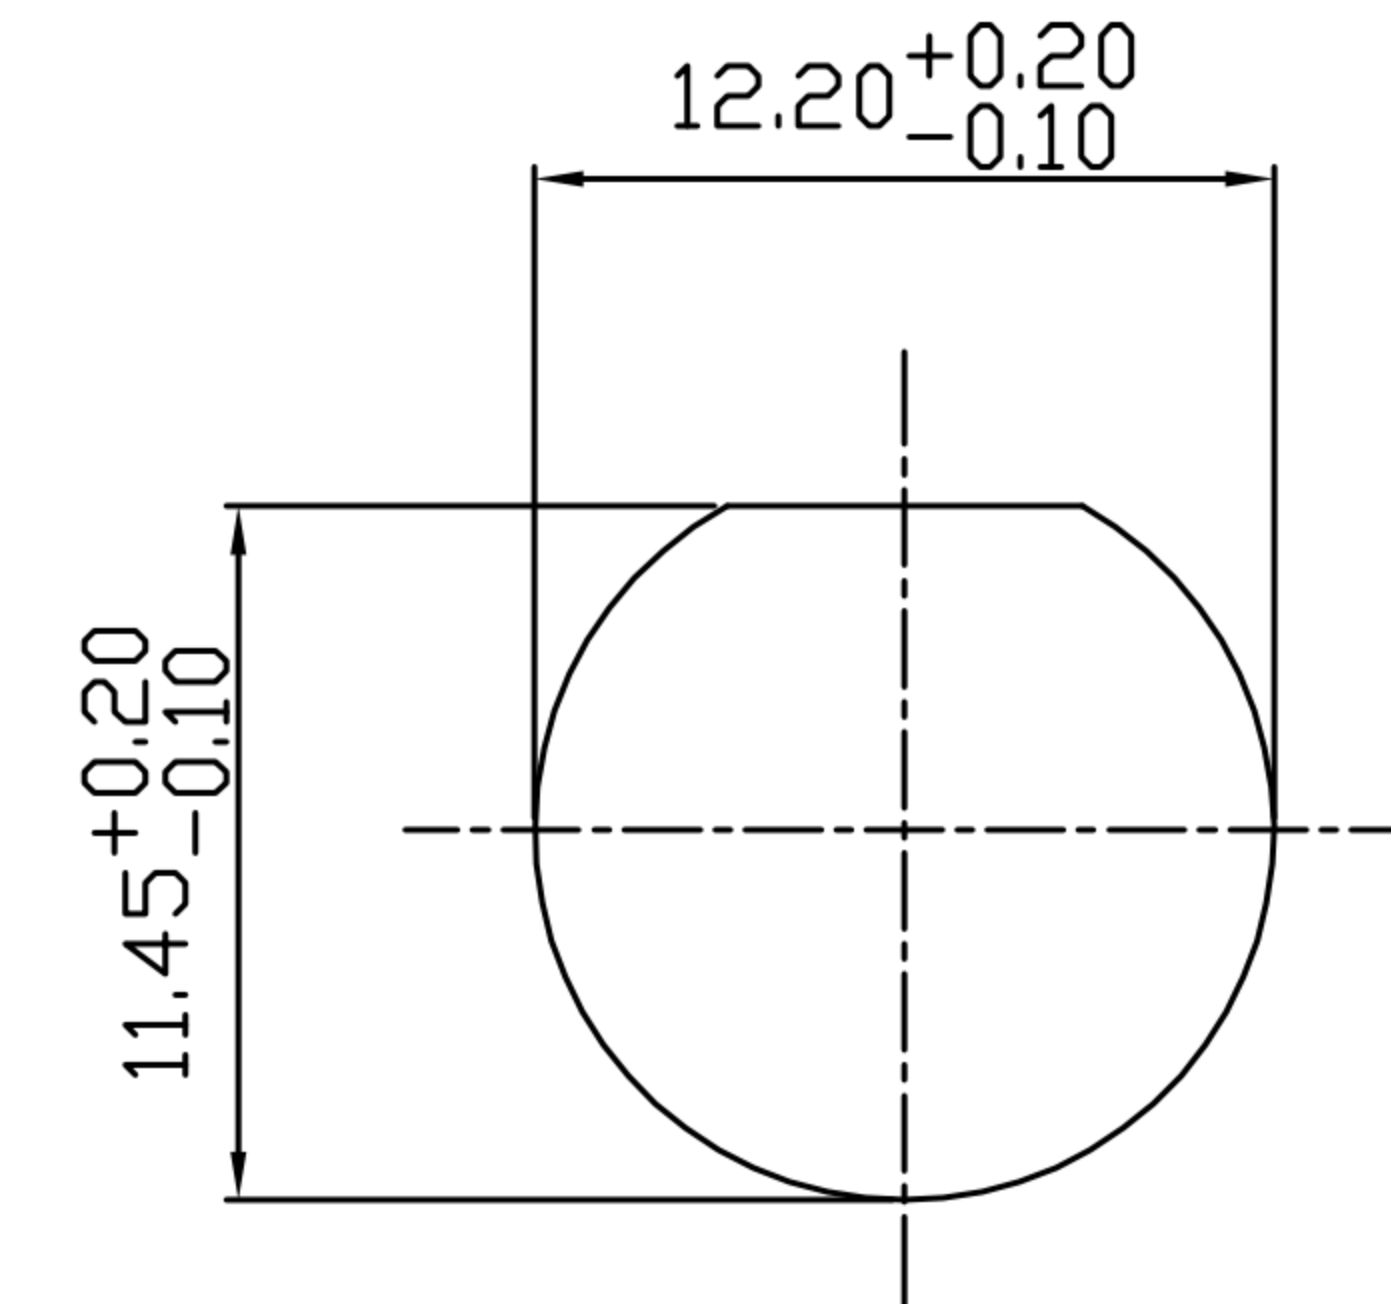
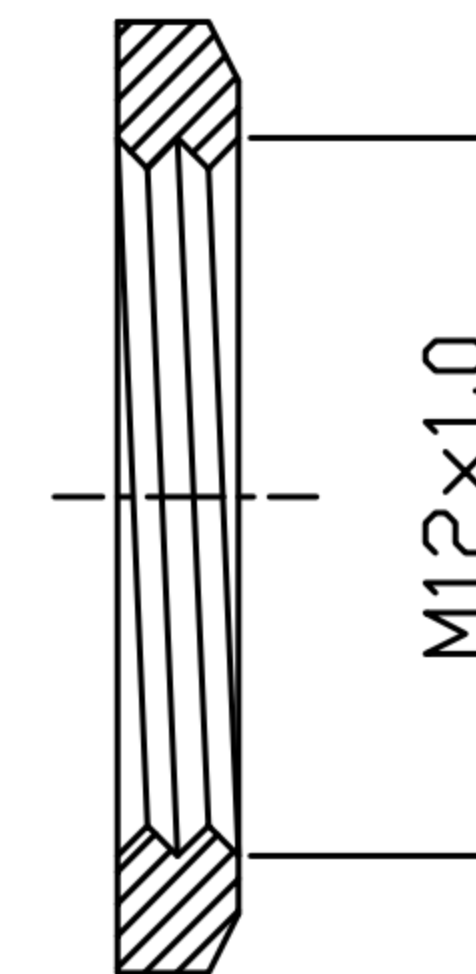
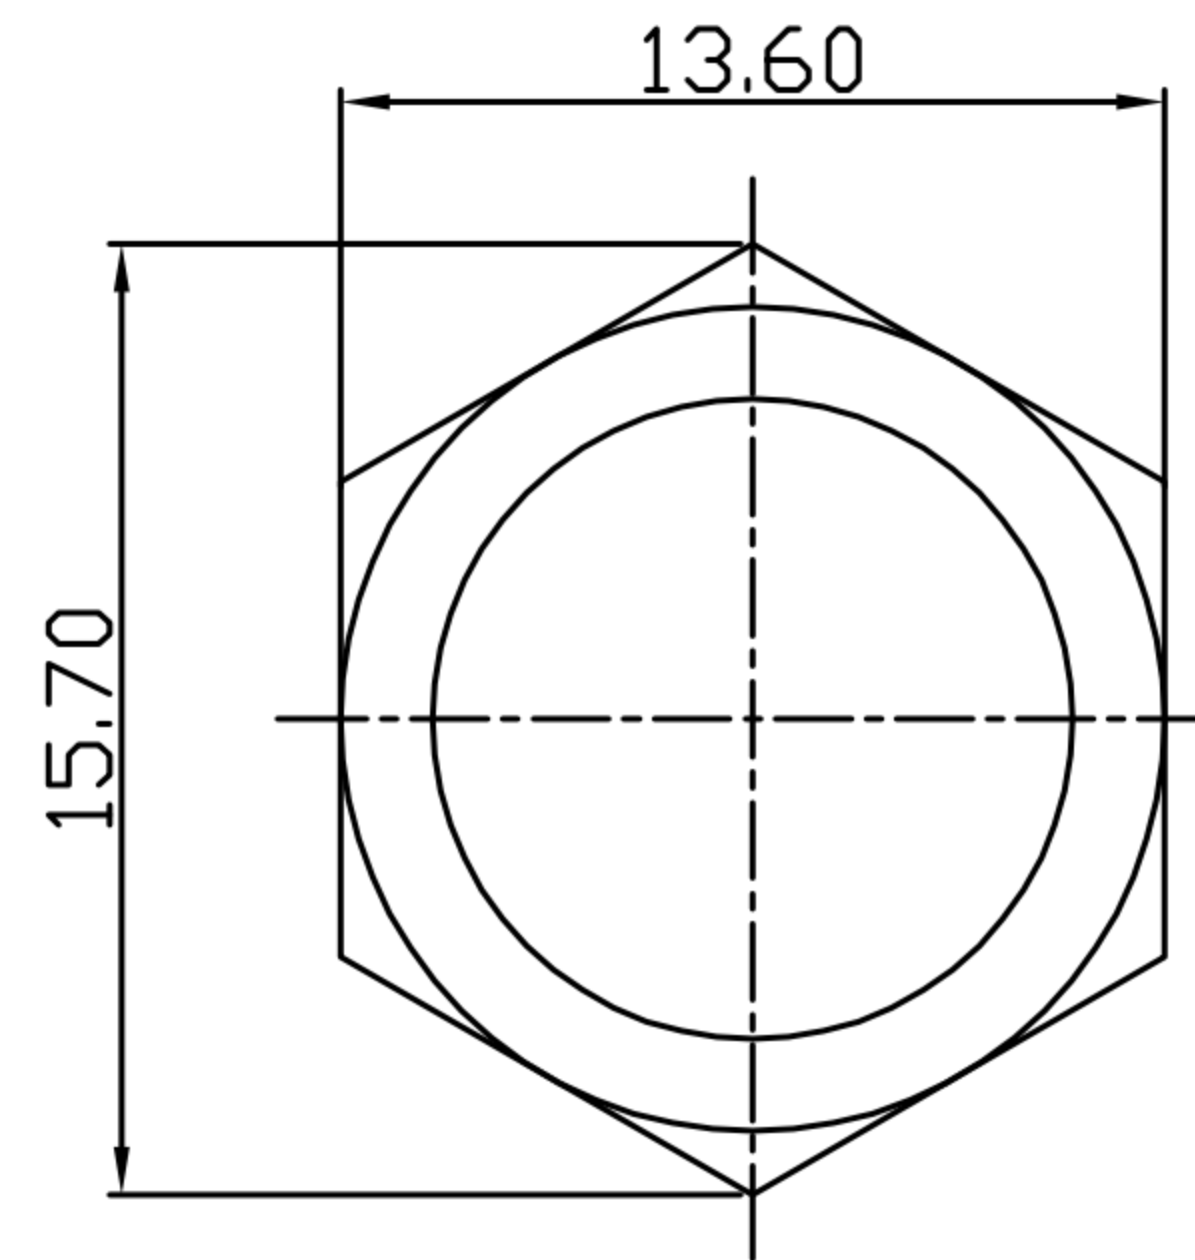





CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	22/11/10*	
B	MODIFY DIM.	Yeh Chou	29/05/20*	
C				

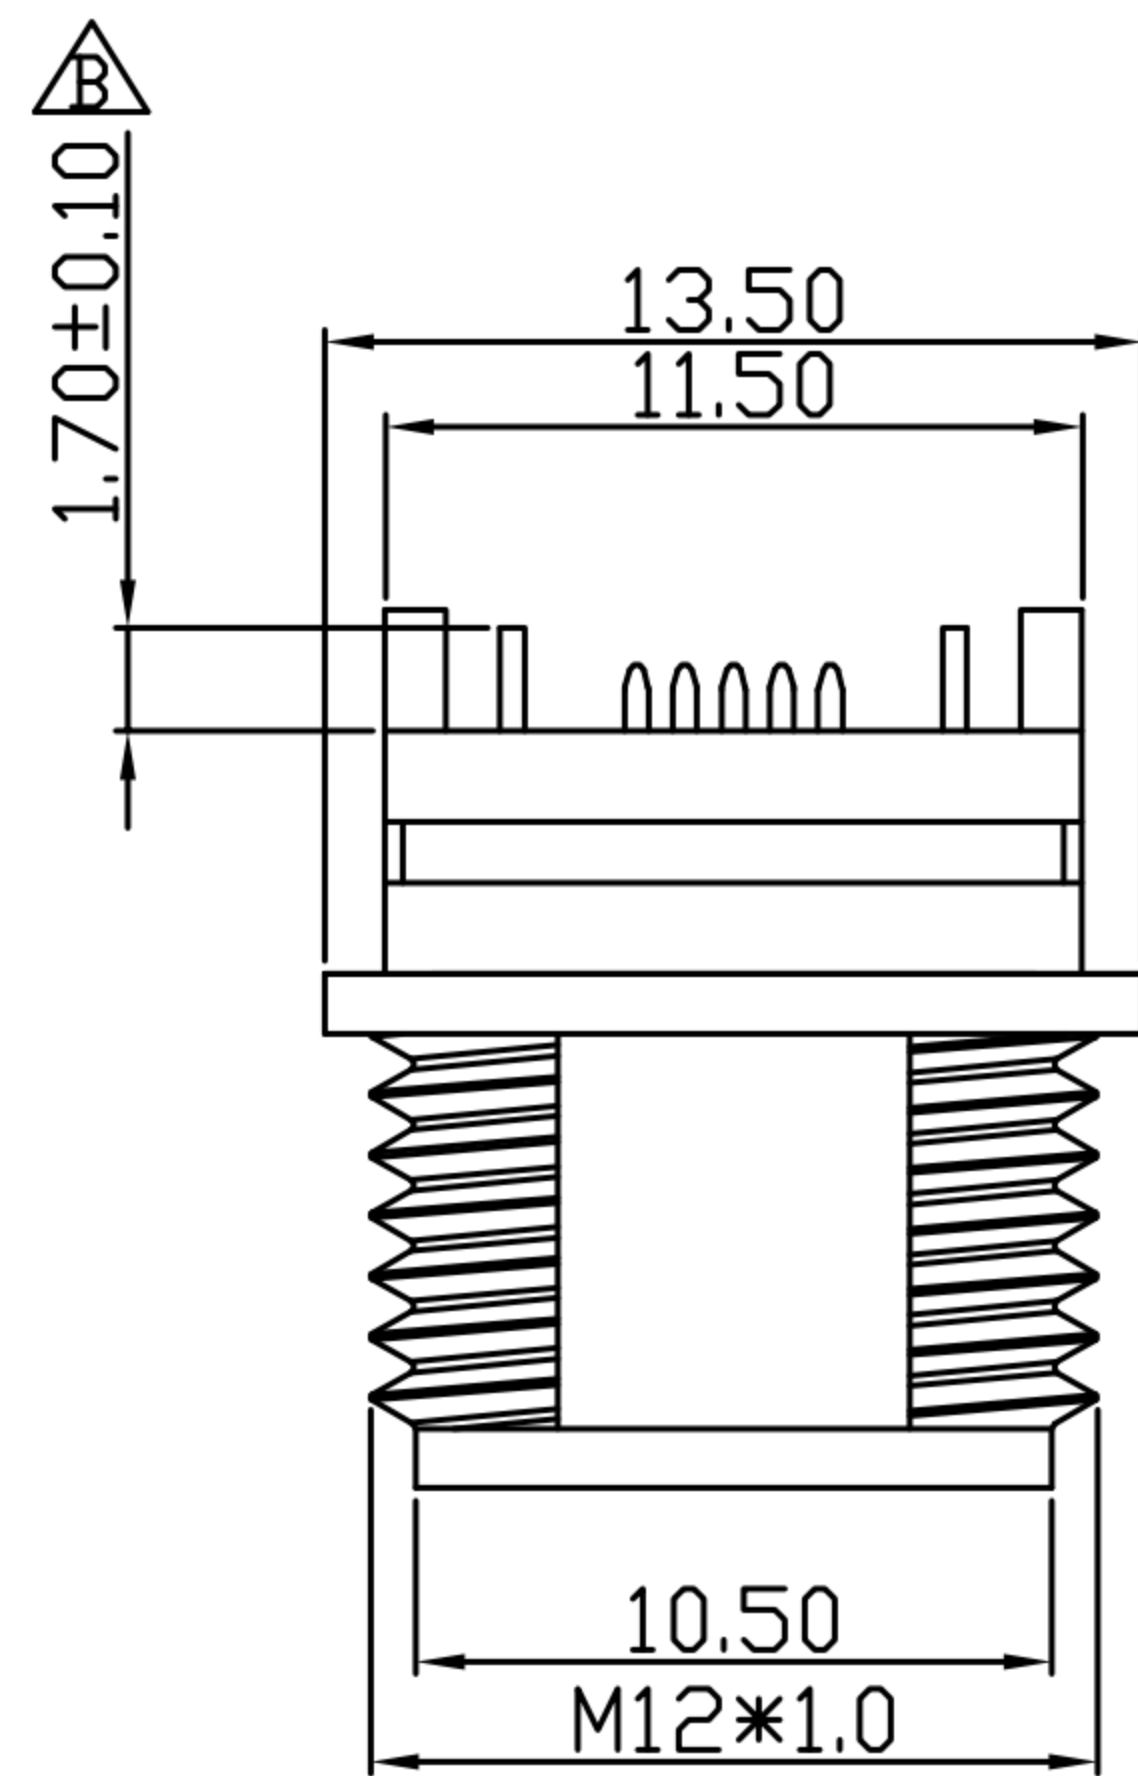

NUT

PUT OUT

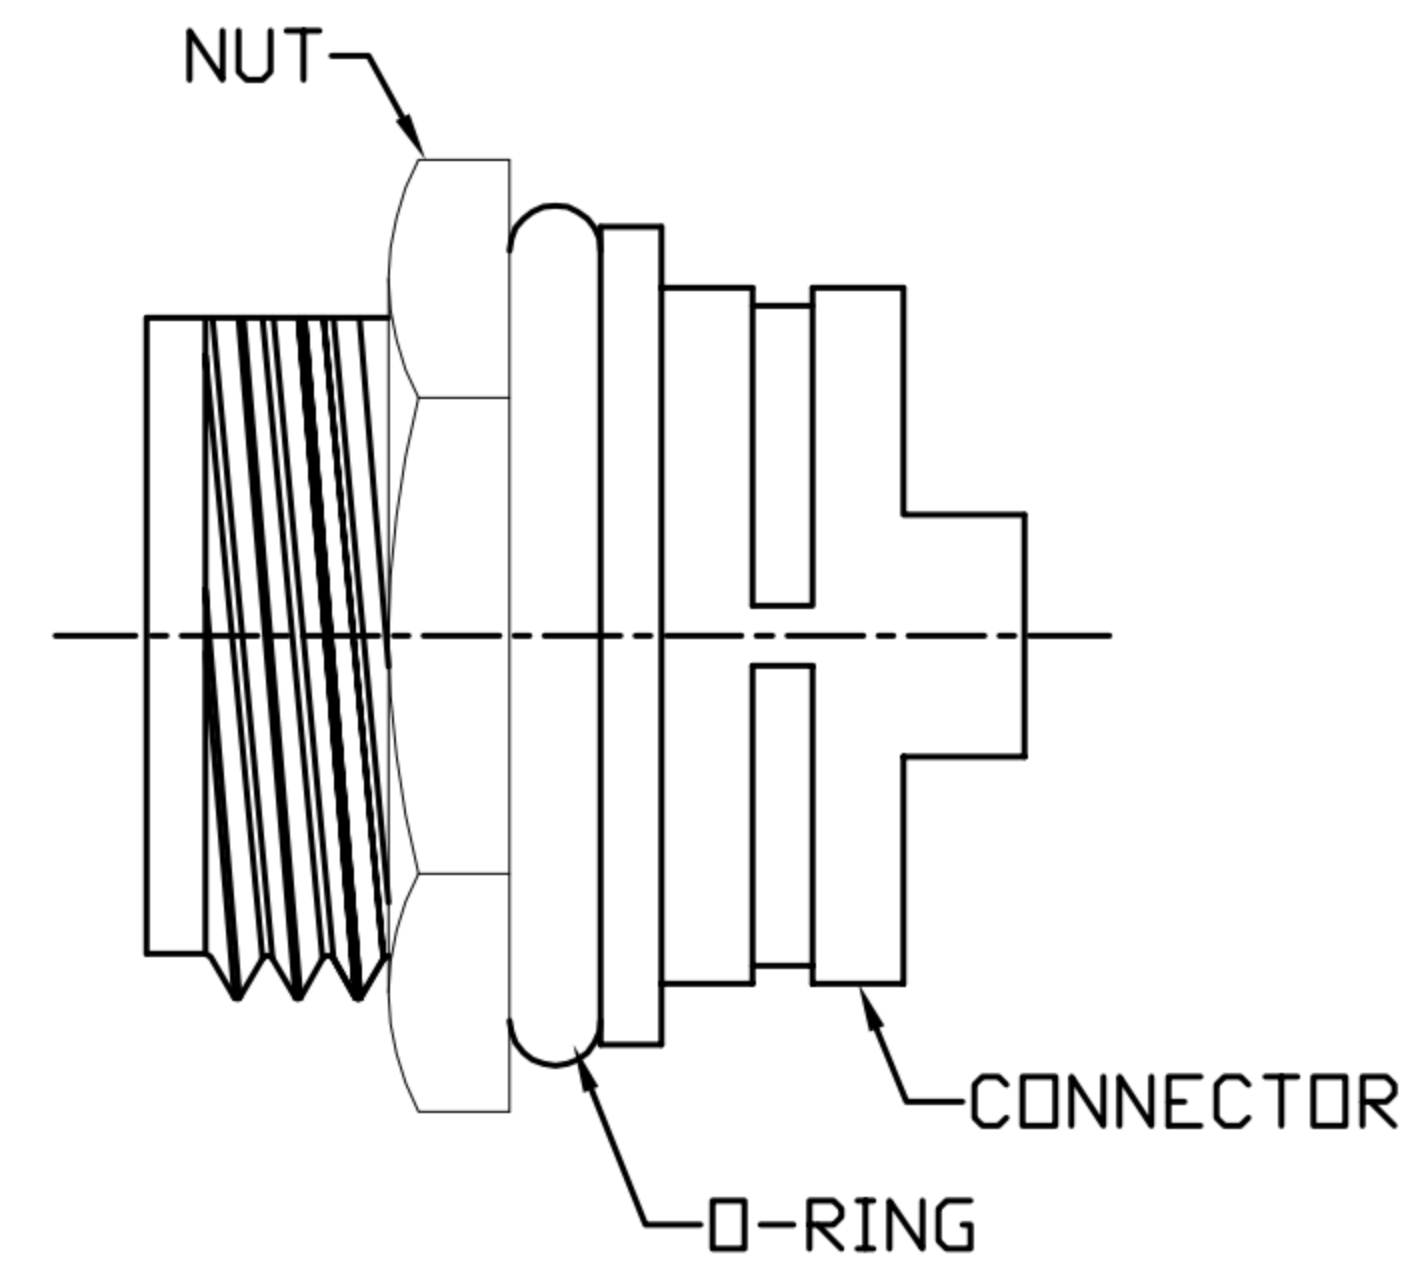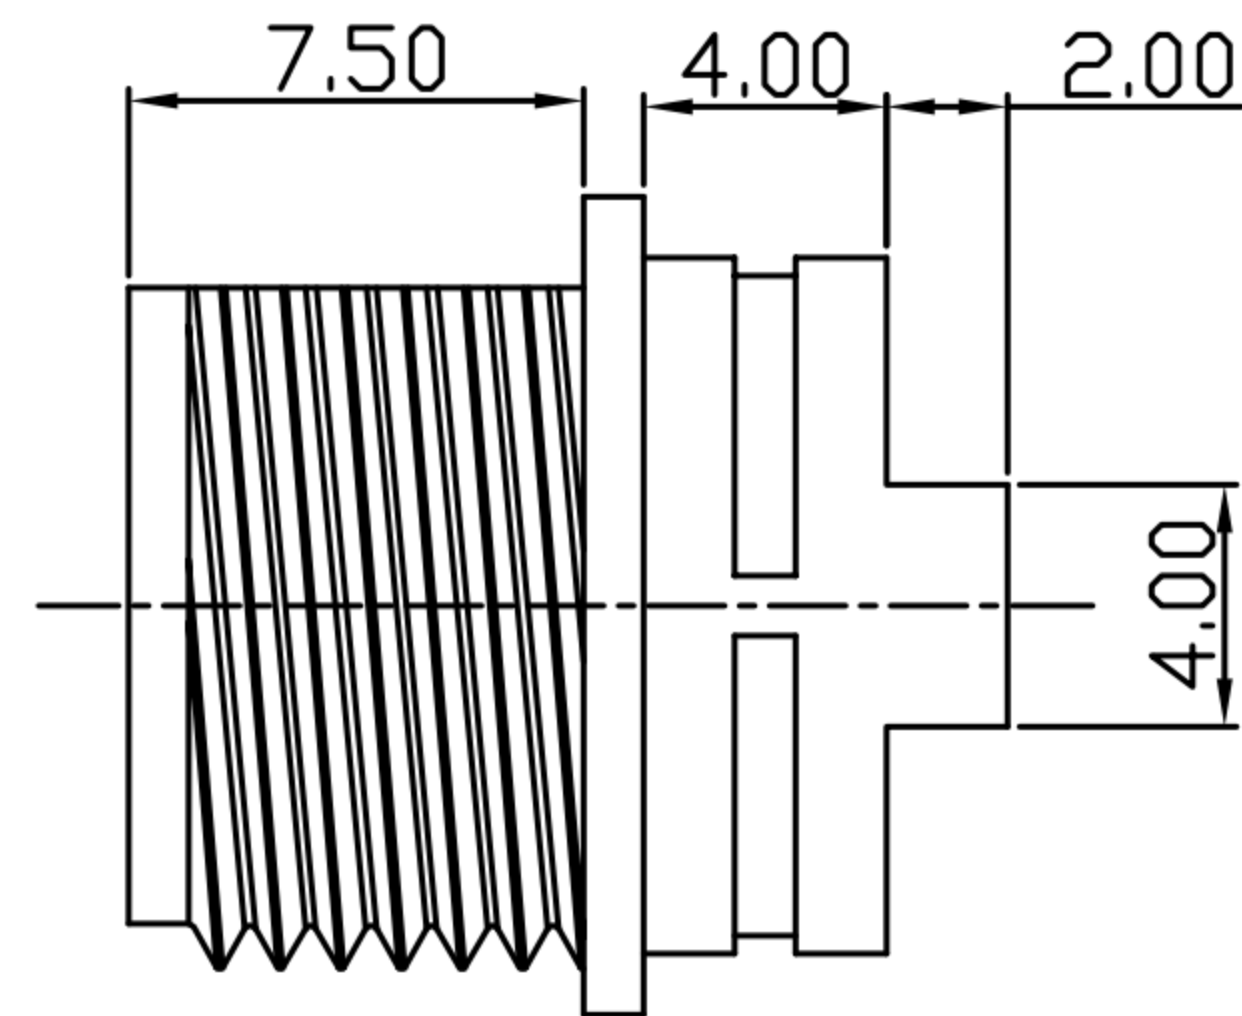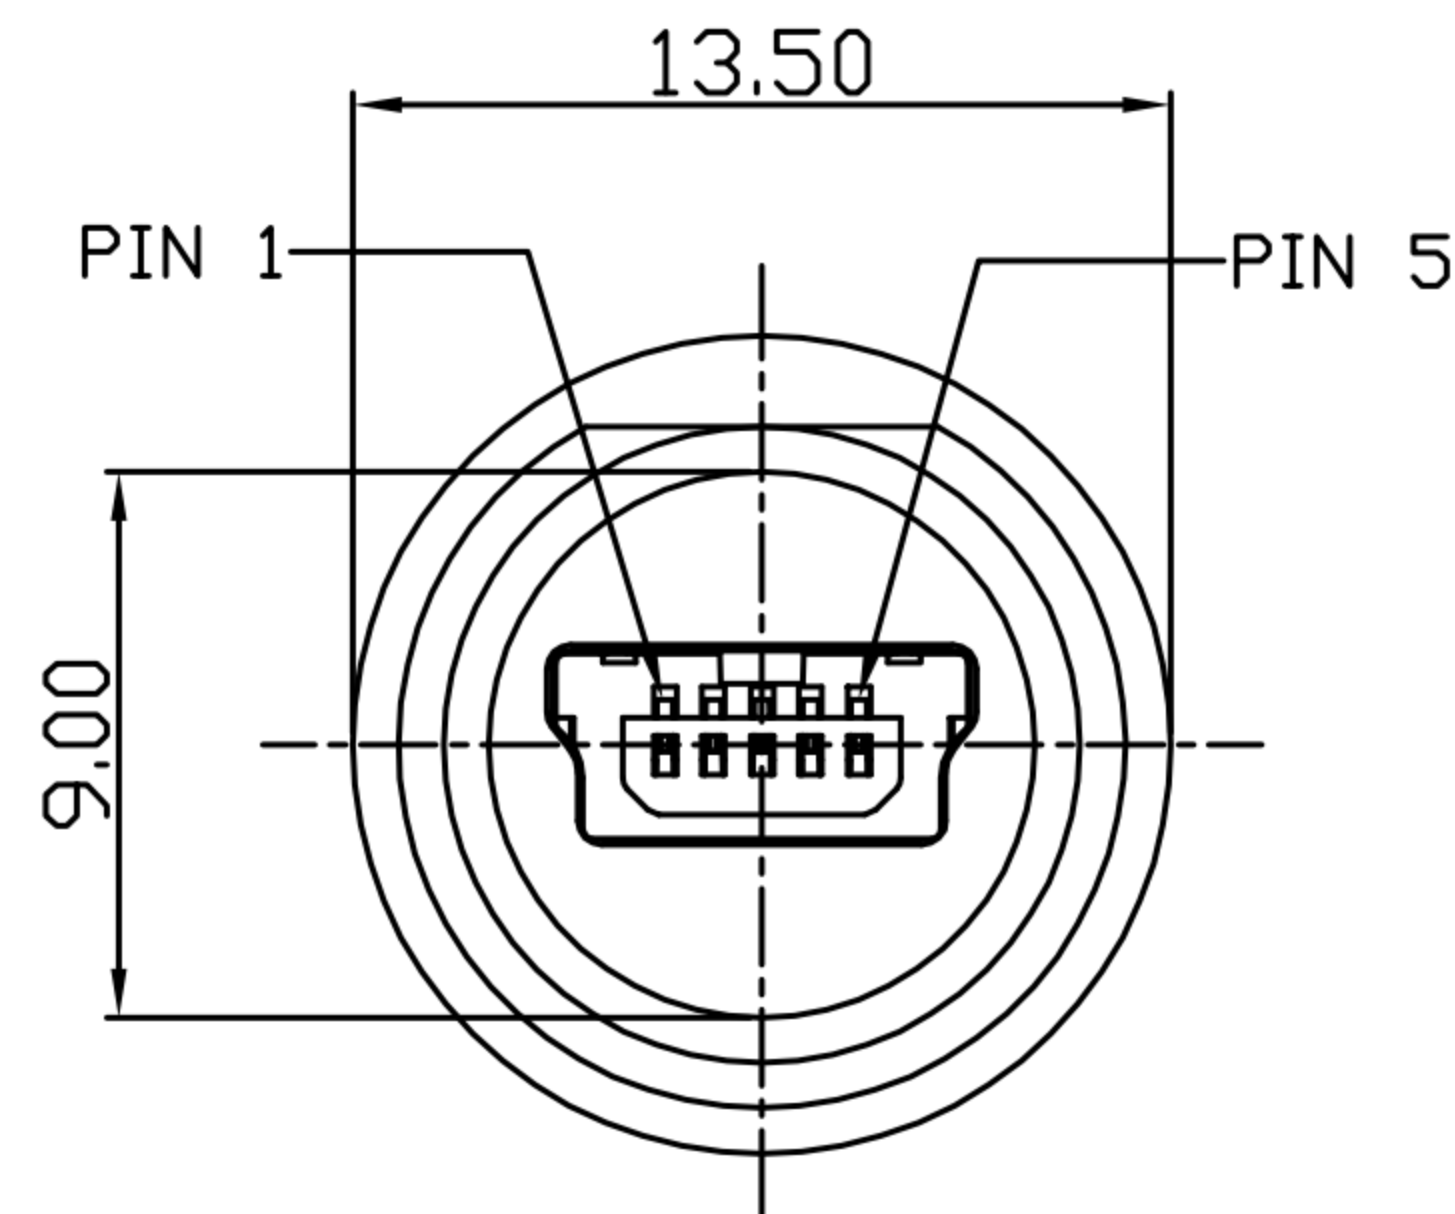

1. MATERIAL :
- 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. SHELL : BRASS
2. PARTS
- 2-1. EXTERNAL NUT : PBT UL94V-0 ; COLOR : BLACK
 - 2-2. O-RING : EPDM (1.5*9.5) ; COLOR : BLACK.
3. PLATING
- 3-1. CONTACT : GOLD PLATING ON CONTACT AREA
BRIGHT TIN ON SOLDER AREA
 - 3-2. SHELL : NICKEL PLATING ON OVER ALL
4. ELECTRICAL SPECIFICATION :
- 4-1. Water proof: IP67/68
 - 4-2. RATED CURRENT : 1A
 - 4-3. RATED VOLTAGE : 30V

DRAWN	Yeh	APP'D	Emily Suen	UNIT	mm	TOLERANCE		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	MINI USB 5P(F) 防水			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	MU-05F1-08	DWG NO.	QC5102	VERSION B