




RoHS Compliant
2002/95/EC






MODEL CODE

SS-16F03 -

(mm)
~



DIMENSIONS

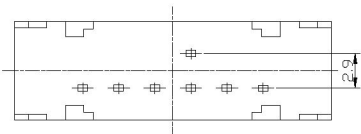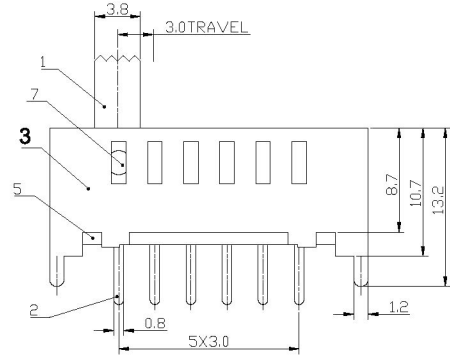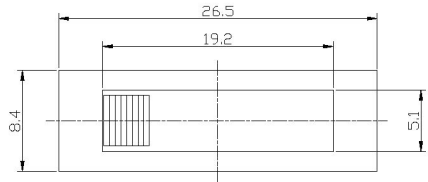

NO.	PARTS	MATERIAL	Q'TY	FINISHING
7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	BASE	PHENOLIC RESIN	1	BLACK
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	STEEL STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	12	Ag PLATED
1	KNOB	POM	1	BLACK

RATING	0.3A 50V DC
CIRCUIT	2P6T
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	3 mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δ X					ANGULAR ±5°
Δ X					L ≤ 4 ±0.2
Δ X					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DWN	DATE	SCALE: N/A	MODEL T /FE.
CHKD	DATE	VIEW:	SLIDE SWITCH
APPD	DATE	UNIT: mm	PART NO.: SS-16F03
	DATE	SIZE: A4	DWG NO.: SS-16F03-X-X
		WEIGHT	SHEET
		1.0g	1/1
			REVISION
			A0

For and on behalf of

REVISIONS
www.bodongkaiguan.net www.ksdkg.com

KOSOD TECHNOLOGY CO., LTD